

Is there an Oblivious RAM Lower Bound for Online Reads?

Mor Weiss*

Daniel Wichs†

April 22, 2021

Oblivious RAM (ORAM), introduced by Goldreich and Ostrovsky (JACM 1996), can be used to read and write to memory in a way that hides which locations are being accessed. The best known ORAM schemes have an $O(\log n)$ overhead per access, where n is the data size. The work of Goldreich and Ostrovsky gave a lower bound showing that this is optimal for ORAM schemes that operate in a “balls and bins” model, where memory blocks can only be shuffled between different locations but not manipulated otherwise. The lower bound even extends to weaker settings such as *offline* ORAM, where all of the accesses to be performed need to be specified ahead of time, and *read-only* ORAM, which only allows reads but not writes. But can we get lower bounds for general ORAM, beyond “balls and bins”?

The work of Boyle and Naor (ITCS '16) shows that this is unlikely in the *offline* setting. In particular, they construct an offline ORAM with $o(\log n)$ overhead assuming the existence of small sorting circuits. Although we do not have instantiations of the latter, ruling them out would require proving new circuit lower bounds. On the other hand, the recent work of Larsen and Nielsen (CRYPTO '18) shows that there indeed is an $\Omega(\log n)$ lower bound for general *online* ORAM.

This still leaves the question open for online *read-only* ORAM or for *read/write* ORAM where we want very small overhead for the read operations. In this work, we show that a lower bound in these settings is also unlikely. In particular, our main result is a construction of online ORAM where *reads* (but not *writes*) have an $o(\log n)$ overhead, assuming the existence of small sorting circuits as well as very good *locally decodable codes* (LDCs). Although we do not have instantiations of either of these with the required parameters, ruling them out is beyond current lower bounds.

*Faculty of Engineering, Bar-Ilan University, Ramat-Gan, Israel, mor.weiss@biu.ac.il.

†Department of Computer Science, Northeastern University, Boston, Massachusetts, USA, wichs@ccs.neu.edu.

Contents

1	Introduction	2
1.1	Our Contributions	3
1.2	Our Techniques	6
1.2.1	Read-Only ORAM	6
1.2.2	ORAM with Writes	7
1.3	Open Questions and Future Directions	8
2	Preliminaries	8
2.1	Locally Decodable Codes (LDCs)	8
2.2	Oblivious-Access Sort Algorithms	9
2.3	Oblivious RAM (ORAM)	10
3	Read-Only ORAM from Oblivious-Access Sort and Smooth LDCs	12
3.1	Read-Only ORAM with Oblivious Setup	18
4	Oblivious RAM Supporting Writes with $o(\log n)$ Read Complexity	21

1 Introduction

An *Oblivious RAM (ORAM)*, first introduced by Goldreich and Ostrovsky [Gol87, Ost90, GO96], is a scheme that allows a client to read and write to his data stored on untrusted storage, while entirely hiding the access pattern, i.e., which operations were performed and at which locations. More precisely, we think of the client’s data as “logical memory” which the ORAM scheme encodes and stores in “physical memory”. Whenever the client wants to read or write to logical memory, the ORAM scheme translates this operation into several accesses to the physical memory. Security ensures that for any two (equal length) sequences of access to logical memory, the resultant distributions over the physical accesses performed by the ORAM are computationally (or statistically) close. Following its introduction, there has been a large body of work on ORAM constructions and security [SCSL11, GMOT12, KLO12, WS12, SvDS+13, RFK+15, DvDF+16], as well as its uses in various application scenarios (see, e.g., [GKK+12, GGH+13, LPM+13, LO13, MLS+13, SS13, YFR+13, CKW13, WHC+14, MBC14, KS14, LHS+14, GHJR15, BCP15, HOWW19]).

One can always trivially hide the memory access pattern by performing a linear scan of the entire memory for *every* memory access. Consequently, an important measure of an ORAM scheme is its *overhead*, namely the (worst-case) number of memory blocks which need to be accessed to answer a *single* read or write request. Goldreich and Ostrovsky [GO96] proved a lower bound of $\Omega(\log n)$ on the ORAM overhead, where n denotes the number of memory blocks in the logical memory. There has also been a large body of works on constructing schemes that achieve this bound (though mostly in the amortized setting), starting with [SvDS+13, WCS15], that achieve the bound if the block size is set to a sufficiently large polylogarithmic term; followed by works [PPRY18] achieving $O(\log n \log \log n)$ overhead for $\Omega(\log n)$ block size, assuming one-way functions; and culminating in the work of [AKL+20]¹ that build on [PPRY18] and improve their overhead to the optimal $O(\log n)$ overhead. We note that one can circumvent the [GO96] lower bound by *relaxing* the notion of ORAM to either allow server-side computation [AKST14], or multiple non-colluding servers [LO13], and several works have obtained *sub-logarithmic overhead* in these settings [AKST14, FNR+15, DvDF+16, ZMQ16, AFN+17, GKW18, KM19]. However, in this work we focus on the standard ORAM setting with a single server and no server-side computation.

In some respects, the lower bound of [GO96] is very general. First, it applies to all block sizes. Second, it holds also in restricted settings: when the ORAM is only required to work for *offline* programs in which, roughly, all memory accesses are stated explicitly in advance; and for *read-only* programs that do not update the memory contents. However, in other respects, the bound is restricted since it only applies to ORAM schemes that operate in the “balls and bins” model, in which memory can only be manipulated by moving memory blocks (“balls”) from one memory location (“bin”) to another. Therefore, the main question left open by the work of [GO96] is: *is there an ORAM lower bound for general ORAM schemes, that are not restricted to operate in the “balls and bins” model?*

Almost 20 years after Goldreich and Ostrovsky proved their lower bound, it was revisited by Boyle and Naor [BN16], who show how to construct an ORAM scheme *in the offline setting* with $o(\log n)$ overhead, using sorting circuits of size $o(n \log n)$. Though sorting circuits of such size are not known, ruling out their existence seems currently out of our reach. This result can be interpreted in two ways. On the one hand, an optimist will view it as a possible approach towards an ORAM construction in the offline setting, which uses “small” sorting circuits as a building block. On the other hand, a pessimist may view this result as a barrier towards proving a lower bound. Indeed, the [BN16] construction shows that proving a lower bound on the overhead of

¹The work of [AKL+20] was published after the conference version of this paper [WW18].

offline ORAM schemes would yield lower bounds on the size of sorting circuits, and proving circuit lower bounds is notoriously difficult. We note that unlike sorting *networks*, which only contain “compare-and-swap” gates that operate on the two input words as a whole, and for which a simple $\Omega(n \log n)$ lower bound exists, sorting *circuits* can arbitrarily operate over the input bits, and no such lower bounds are known for them.

The main drawback of the Boyle and Naor result [BN16] is that it only applies to the *offline* setting, which is not very natural and is insufficient for essentially any imaginable ORAM application. More specifically, the offline setting requires that *the entire sequence of accesses* be specified in advance - including *which operation* is performed, on *which address*, and in case of a write operation, *what value* is written. However, even very simple and natural RAM programs (e.g., binary search) require dynamic memory accesses that depend on the results of previous operations. Despite this drawback, the result of Boyle and Naor is still very interesting since it shows that lower bounds which are easy to prove in the “balls and bins” model might not extend to the general model. However, it does not answer the question of whether general ORAM lower bounds exist in the *online* setting, which is the one of interest for virtually all ORAM applications.

Very recently, and concurrently with our work, Larsen and Nielsen [LN18] proved that the [GO96] lower bound *does* indeed extend to general *online* ORAM. Concretely, they show an $\Omega(\log n)$ lower bound on the *combined* overhead of read and write operations in any general online ORAM, even with computational security. Their elegant proof employs techniques from the field of data-structure lower bounds in the cell-probe model, and in particular the “information-transfer” method of Pătraşcu and Demaine [PD06].

1.1 Our Contributions

In this work, we explore the *read overhead* of general ORAM schemes *beyond the “balls and bins” model* and in the *online setting*. We first consider *read-only* ORAM schemes that only support reads – but not writes – to the logical memory. We stress that the scheme is read-only in the sense that it only supports programs that do not write to the *logical* memory. However, to emulate such programs in the ORAM, the client might write to the *physical* memory stored on the server. We note that read-only ORAM already captures many interesting applications such as private search over a database, or fundamental algorithmic tasks such as binary search. We show how to construct *online* read-only ORAM schemes with $o(\log n)$ overhead assuming “small” sorting circuits and “good” Locally Decodable Codes (LDCs). We then extend our results to a setting which also supports sub-linear writes but does not try to hide whether an operation is a *read* or a *write* and, in particular, allows different overheads for these operations. In all our constructions, the server is only used as remote storage, and does not perform any computations.

We note that, similar to [BN16], our results rely on primitives that we do not know how to instantiate with the required parameters, but also do not have any good lower bounds for. One can therefore interpret our results either positively, as a blueprint for an ORAM construction, or negatively as a barrier to proving a lower bound in these settings. For simplicity of the exposition, we choose to present our results through the “optimistic” lens.

We now describe our results in more detail.

Read-Only (RO) ORAM. We construct a read-only ORAM scheme, based on sorting circuits and smooth locally decodable codes. Roughly, a Locally Decodable Code (LDC) [KT00] has a decoder algorithm that can recover any message symbol by querying only few codeword symbols. In a smooth code, every individual decoder query is uniformly distributed. Given a logical memory of size- n , our scheme has $O(\log \log n)$ overhead, assuming the existence of linear-size sorting circuits,

and smooth LDCs with constant query complexity and polynomial length codewords. Concretely, we get the following theorem.

Theorem 1.1 (Informal statement of Corollary 3.2). *Suppose there exist linear-size boolean sorting circuits, and smooth LDCs with constant query complexity and polynomial length codewords. Then there exists a statistically-secure read-only ORAM scheme for memory of size n and blocks of size $\text{poly } \log n$, with $O(1)$ client storage and $O(\log \log n)$ overhead.*

In Section 3, we also show a read-only ORAM scheme with $o(\log n)$ overhead based on milder assumptions – concretely, smooth LDCs with $O(\log \log n)$ query complexity, and the existence of sorting circuits of size $o\left(\frac{n \log n}{\log^2 \log n}\right)$; see Corollary 3.3. We note that under the (strong) assumption that the LDC has linear-size codewords, our constructions achieve linear-size server storage. We also note that if an a-priori polynomial bound on the number of memory accesses is known, then the constructions can be based solely on LDCs, and the assumption regarding small sorting circuits can be removed.

ORAM schemes supporting writes. The read-only ORAM scheme described above still leaves the following open question: *is there a lower bound on read overhead for ORAM schemes supporting write operations?* To partially address this question, we extend our ORAM construction to a scheme that supports writes but does not hide whether an operation was a read or a write. In this setting, read and write operations may have different overheads, and we focus on minimizing the overhead of read operations while preserving efficiency of write operations as much as possible. Our construction is based on the existence of sorting circuits and smooth LDCs as in Theorem 1.1, as well as the existence of One-Way Functions (OWFs). (We elaborate on why OWFs are needed in Section 1.2.) Assuming the existence of such building blocks, our scheme has $O(\log \log n)$ read overhead and $O(n^\epsilon)$ write overhead for an arbitrarily small constant $\epsilon \in (0, 1)$, whose exact value depends on the efficiency of the LDC encoding. Concretely, we show the following:

Theorem 1.2 (Informal statement of Theorem 4.1). *Assume the existence of OWFs, as well as LDCs and sorting circuits as in Theorem 1.1. Then for every constant $\epsilon \in (0, 1)$, there exists a constant $\gamma \in (0, 1)$ such that if LDC encoding requires $n^{1+\gamma}$ operations then there is a computationally-secure ORAM scheme for memory of size n and blocks of size $\text{poly } \log n$ with $O(1)$ client storage, $O(\log \log n)$ read overhead, and $O(n^\epsilon)$ write overhead.*

Similar to the read-only setting, we also instantiate (Section 4, Theorem 4.2) the ORAM with writes scheme based on milder assumptions regarding the parameters of the underlying sorting circuits and LDCs, while only slightly increasing the read overhead. Additionally, we describe a variant of our scheme with improved write complexity, again at the cost of slightly increasing the read overhead:

Theorem 1.3 (Informal statement of Theorem 4.3). *Assume the existence of OWFs, as well as LDCs and sorting circuits as in Theorem 1.1, where LDC encoding requires $n^{1+o(1)}$ operations. Then there exists a computationally-secure ORAM scheme for memory of size n and blocks of size $\text{poly } \log n$ with $O(1)$ client storage, $o(\log n)$ read overhead, and $n^{o(1)}$ write overhead.*

A note on block vs. word size. In our constructions we distinguish between *words* (which are bit strings) and *blocks* (which consist of several words). More specifically, words, which are the basic unit of physical memory on the server, consist of w bits; and blocks, which are the basic unit of logical memory on the client, consist of B words. We measure the overhead as the number

of words the client accesses on the server to read or write to a single logical block, divided by B . We note that it is generally easier to construct schemes with *smaller* word size. (Indeed, it allows the client more fine-grained access to the physical memory; a larger word size might cause the client to access unneeded bits on the server, simply because they are part of a word containing bits that do interest the client.) Consequently, we would generally like to support *larger* word size, ideally having words and blocks of equal size. Our constructions can handle any word size,² as long as blocks are poly-logarithmically larger (for a sufficiently large polylogarithmic factor). A similar differentiation between block and word size was used in some previous works as well (e.g., in [SCSL11, SSS12], and to get $O(\log N)$ overhead in Path ORAM [SvDS⁺13]).

A note regarding assumptions. We instantiate our constructions in two parameter regimes: one based on the existence of “best possible” sorting circuits and smooth LDCs (as described above), and one based on milder assumptions regarding the parameters of these building blocks (as discussed in Sections 3 and 4). We note that despite years of research in these fields, we currently seem very far from ruling out the existence of even the “best possible” sorting circuits and smooth LDCs. Concretely, to the best of our knowledge there are no specific lower bounds for sorting circuits (as opposed to sorting networks, see discussion above and in Section 2.2), and even for general boolean circuits only linear lower bounds of $c \cdot n$ for some constant $c > 1$ are known [Blu84, IM02, FGHK16]. Regarding LDCs, research has focused on the relation between the query complexity and codeword length in the constant query regime, but there are currently no non-trivial lower bounds for *general* codes. Even for restricted cases, such as *binary* codes, or *linear* codes over arbitrary fields, the bounds are extremely weak. Specifically, the best known lower bound shows that codewords in q -query LDCs must have length $\Omega(n^{(q+1)/(q-1)} / \log n)$ [Woo07] (which, in particular, does not rule out the existence of 4-query LDCs with codeword length $n^{5/3}$), so it is plausible that for a sufficiently large constant, constant-query LDCs with polynomial length codewords exist. We note that a recent series of breakthrough results construct *3-query* LDCs with *sub-exponential* codewords of length $\exp(\exp(O(\sqrt{\log n \log \log n}))) = 2^{n^{o(1)}}$, as well as extensions to larger (constant) query complexity [Yek07, Rag07, Efr09, IS10, CFL⁺13]. Notice that lower bounds on the size of the encoding circuit of such codes will similarly yield circuit lower bounds.

A note on the connection to Private Information Retrieval (PIR) and Doubly-Efficient PIR (DEPIR). The notions of PIR and DEPIR, which support reads from memory stored on a remote server, are closely related to read-only ORAM, but differ from it significantly in some respects. We now discuss these primitives in more detail. In a (single-server) PIR scheme [KO97], there is no initial setup, and anybody can run a protocol with the server to retrieve an arbitrary location in the logical memory. The server is *not* used solely as remote storage, and in fact the main goal, which is to minimize the communication between the client and server, *inherently* requires the server to perform computations. One additional significant difference from ORAM is that the PIR privacy guarantee *inherently* requires the server runtime to be linear in the size of the logical memory, whereas a main ORAM goal is to have the server touch only a sublinear number of blocks (which the client reads from it to retrieve the block he is interested in). In a DEPIR scheme [BIM00, BIPW17, CHR17], there is a setup phase (as in ORAM), following which the server(s) stores an encoded version of the logical memory, and the logical memory can be accessed either with no key (in multi-server DEPIR [BIM00]), with a public key (in public-key DEPIR [BIPW17]) or with a secret key (in secret-key DEPIR [BIPW17, CHR17]). First proposed by Beimel, Ishai and Malkin [BIM00], who showed how to construct information-theoretic

²Similar to previous works (e.g., [SCSL11, SvDS⁺13, SS13]), we assume words are of at least logarithmic size.

DEPIR schemes in the multi-server setting (i.e., with several non-colluding servers), two recent works [BIPW17, CHR17] give the first evidence that this notion may be achievable in the single-server setting. These works achieve sublinear server runtime, with a server that is only used as remote storage. Thus, these single-server DEPIR schemes satisfy all the required properties of a RO-ORAM scheme, with the added “bonus” of having a stateless server (namely, whose internal memory does not change throughout the execution of the scheme). However, these (secret-key) constructions are based on new, previously unstudied, computational hardness assumptions relating to Reed-Muller codes, and the public-key DEPIR scheme of [BIPW17] additionally requires a heuristic use of obfuscation. Unfortunately, both of the above assumptions are non-standard, poorly understood, and not commonly accepted. Additionally, these constructions do not achieve $o(\log n)$ overhead (at least not with polynomial server storage).

A note on statistical vs. computational security. Our RO-ORAM achieves *statistical* security under the assumption that the server does not see the memory *contents*, namely the server only sees which memory locations are accessed. Hiding memory contents from the server can be generically achieved by encrypting the logical memory, in which case security holds against *computationally-bounded* servers. We note that our ORAM scheme supporting writes requires encrypting the logical memory *even if the server does not see the memory contents*. Consequently, our ORAM with writes scheme achieve computational security even in the setting where the server does not see the memory contents. Alternatively, our construction can achieve statistical security if the underlying LDC has the additional property that the memory accesses during encoding are independent of the data. (This property is satisfied by, e.g., linear codes.) We elaborate on this further in Sections 3.1 and 4.

1.2 Our Techniques

We now give a high-level overview of our ORAM constructions. We start with the read-only setting, and then discuss how to enable writes.

We note that our technique departs quite significantly from that of Boyle and Naor [BN16], whose construction seems heavily tied to the offline setting. Indeed, the high-level idea underlying their scheme is to use the sorting circuit to sort by location the list of operations that need to be performed, so that the outcomes of the read operations can then be easily determined by making one linear scan of the list. It does not appear that this strategy can naturally extend to the *online* setting in which the memory accesses are not known a-priori.

1.2.1 Read-Only ORAM

We first design a Read-Only (RO) ORAM scheme that is secure only for an *a-priori bounded* number of accesses, then extend it to a scheme that remains secure for *any* polynomial number of accesses.

Bounded-access RO-ORAM using metadata. Our RO-ORAM scheme employs a smooth LDC, using the decoder to read from memory. Recall that a k -query LDC is an error-correcting code in which every message symbol can be recovered by querying k codeword symbols. The server in our scheme stores k copies of the codeword, each permuted using a separate, random permutation. (We note that permuted LDCs were already used – but in a very different way – in several prior works [HO08, HOSW11, CHR17, BIPW17].) To read the memory block at address j , the client runs the decoder on j , and sends the decoder queries to the server, who uses the i 'th permuted codeword copy to answer the i 'th decoding query. This achieves correctness, but does

not yet guarantee obliviousness since the server learns, for each $1 \leq i \leq k$, which read operations induced the same i 'th decoding query.

To prevent the server from obtaining this additional information, we restrict the client to use only *fresh* decoding queries in each read operation, namely a set q_1, \dots, q_k of queries such that no q_i was issued before as the i 'th query. The metadata regarding which decoding queries are fresh, as well as the description of the permutations, can be stored on the server using any sufficiently efficient (specifically, polylogarithmic-overhead) ORAM scheme. Each block in the metadata ORAM will consist of a single word, so using the metadata ORAM will not influence the overall complexity of the scheme, since for sufficiently large memory blocks the metadata blocks are significantly smaller. In summary, restricting the client to make fresh queries guarantees that the server only sees uniformly random decoding queries, which reveal no information regarding the identity of the accessed memory blocks.

However, restricting the client to only make fresh decoding queries raises the question of whether the ORAM is still correct, namely whether this restriction has not harmed functionality. Specifically, *can the client always “find” fresh decoding queries?* We show this is indeed the case as long as the number of read operations is at most $M/2k$, where M denotes the codeword length. More precisely, the smoothness of the code guarantees that for security parameter λ and any index $j \in [n]$, λ independent executions of the decoder algorithm on index j will (with overwhelming probability) produce at least one set of fresh decoding queries. Thus, the construction is secure as long as the client performs at most $M/2k$ read operations.

We note that given an appropriate LDC, this construction already gives a read-only ORAM scheme which is secure for an a-priori *bounded* number of accesses, *without relying on sorting circuits*. Indeed, given a bound B on the number of accesses, all we need is a smooth LDC with length- M codewords, in which the decoder's query complexity is at most $M/2B$.

Handling an unlimited number of reads. To obtain security for an *unbounded* number of read operations, we “refresh” the permuted codeword copies every $M/2k$ operations. (We call each such set of read operations an “epoch”.) Specifically, to refresh the codeword copies the client picks k fresh, random permutations, and together with the server uses the sorting circuit to permute the codeword copies according to the new permutations. Since the logical memory is read-only, the refreshing operations can be spread-out across the $M/2k$ read operations of the epoch.

1.2.2 ORAM with Writes

We extend our RO-ORAM scheme to support write operations, while preserving $o(\log n)$ overhead for read operations. The construction is loosely based on hierarchical ORAM [Ost90, GO96]. The high-level idea is to store the logical memory on the server in a sequence of ℓ levels of increasing size, each containing an RO-ORAM.³ We think of the levels as growing from the top down, namely level-1 (the smallest) is the top-most level, and level- ℓ (the largest) is the bottom-most. Initially, all the data is stored in the bottom level ℓ , and all the remaining levels are empty. To read the memory block at some location j , the client performs a read for location j in the RO-ORAMs of all levels, where the output is the block from the highest level that contains the j 'th block. When the client writes to some location j , the server places that memory block in the top level $i = 1$. After every l_i write operations – where l_i denotes the size of level i – the i 'th level becomes full. All the values in level i are then moved to level $i + 1$, a process which we call a “reshuffle” of level

³This is reminiscent of a construction of [OS97], which also instantiated the levels of a hierarchical ORAM with a primitive guaranteeing read privacy (specifically, they use PIR). However, our goals, and the details of our construction, differs significantly from [OS97].

i into level $i + 1$. Formalizing this high-level intuition requires some care, and the final scheme is somewhat more involved. See Section 4 for details.

We note that our construction differs from Hierarchical ORAM in two main points. First, in Hierarchical ORAM level i is reshuffled into level $i + 1$ every l_i *read or write operations*, whereas in our scheme only write operations are “counted” towards reshuffle (in that respect, read operations are “free”). This is because the data is stored in each level using an RO-ORAM which already guarantees privacy for read operations. Second, Hierarchical ORAM uses $\Omega(\log n)$ levels, whereas to preserve $o(\log n)$ read overhead, we must use $o(\log n)$ levels. In particular, the ratio between consecutive levels in our scheme is no longer constant, leading to a higher reshuffle cost (which is the reason write operations have higher overhead in our scheme).

1.3 Open Questions and Future Directions

Our work still leaves several open questions for future research. A natural question is whether the assumptions can be relaxed or removed. Specifically, can we construct a RO-ORAM scheme with $o(\log N)$ overhead based solely on the existence of “good” LDCs, or alternatively, based only on the existence of small sorting circuits? It would also be interesting to relax the requirements from the LDCs or sorting circuits (e.g., obtaining $o(\log N)$ overhead while relying on larger sorting circuits than in our current constructions). Finally, another possible direction is to prove unconditional lower bounds in a fine-grained setting which, e.g., restricts the round complexity of the ORAM, a research direction recently initiated by [CDH20].

2 Preliminaries

Throughout the paper λ denotes a security parameter. For a length- n string \mathbf{x} and a sequence $I = (i_1, \dots, i_l)$ where $1 \leq i_1 < \dots < i_l \leq n$, \mathbf{x}_I denotes $(x_{i_1}, \dots, x_{i_l})$.

Terminology. Recall that words, the basic unit of physical memory on the server, consist of w bits; and blocks, the basic unit of logical memory on the client, consist of B words. The client may *locally* perform bit operations on the bit representation of blocks, but can only access full words on the server. We will usually measure complexity in terms of logical blocks (namely, in terms of the basic memory unit on the client). More specifically, unless explicitly stated otherwise, client and server storage are measured as the number of *blocks* they store (even though the basic storage unit on the server side is a word), and overhead measures the (worst-case) number of blocks one needs to read or write to implement a read or write operation on a single block. Formally:

Definition 2.1 (Overhead). For a block size B and input length n , we say that a protocol between client C and server S has overhead Ovh for a function $\text{Ovh} : \mathbb{N} \rightarrow \mathbb{N}$, if implementing a read or write operation on a single logical memory block requires the client to access $B \cdot \text{Ovh}(n)$ words on the server.

2.1 Locally Decodable Codes (LDCs)

Locally decodable codes were first formally introduced by [KT00]. We rely on the following definition of smooth LDCs.

Definition 2.2 (Smooth LDC). A smooth k -query *Locally Decodable Code (LDC)* with message length n , and codeword length M over alphabet Σ , denoted by $(k, n, M)_\Sigma$ -*smooth LDC*, is a triplet $(\text{Enc}, \text{Query}, \text{Dec})$ of PPT algorithms with the following properties.

- **Syntax.** Enc is given a message $\text{msg} \in \Sigma^n$ and outputs a codeword $c \in \Sigma^M$, Query is given an index $\ell \in [n]$ and outputs a vector $\mathbf{r} = (r_1, \dots, r_k) \in [M]^k$, and Dec is given $c_{\mathbf{r}} = (c_{r_1}, \dots, c_{r_k}) \in \Sigma^k$ and outputs a symbol in Σ .
- **Local decodability.** For every message $\text{msg} \in \Sigma^n$, and every index $\ell \in [n]$,

$$\Pr[\mathbf{r} \leftarrow \text{Query}(\ell) : \text{Dec}(\text{Enc}(\text{msg})_{\mathbf{r}}) = \text{msg}_{\ell}] = 1.$$

- **Smoothness.** For every index $\ell \in [n]$, every query in the output of $\text{Query}(\ell)$ is distributed uniformly at random over $[M]$.

To simplify notations, when $\Sigma = \{0, 1\}$ we omit it from the notation.

Remark on Smooth LDCs for Block Messages. We will use smooth LDCs for messages consisting of *blocks* $\{0, 1\}^B$ of bits (for some block size $B \in \mathbb{N}$), whose existence is implied by the existence of smooth LDCs over $\{0, 1\}$. Indeed, given a (k, n, M) -smooth LDC $(\text{Enc}, \text{Query}, \text{Dec})$, one can obtain a $(k, n, M)_{\{0, 1\}^B}$ -smooth LDC $(\text{Enc}', \text{Query}', \text{Dec}')$ by “interpreting” the message and codeword as B individual words, where the j ’th word consists of the j ’th bit in all blocks. Concretely, Enc' on input a message $(\text{msg}^1, \dots, \text{msg}^n) \in (\{0, 1\}^B)^n$, computes $y_j^1 \dots y_j^M = \text{Enc}(\text{msg}_j^1, \dots, \text{msg}_j^n)$ for every $1 \leq j \leq B$, sets $c^i = y_1^i \dots y_B^i$, and outputs $c = (c^1, \dots, c^M)$. Query' operates exactly as Query does. Dec' , on input $c^{r_1}, \dots, c^{r_k} \in \{0, 1\}^B$, computes $z_j = \text{Dec}(c_j^{r_1}, \dots, c_j^{r_k})$ for every $1 \leq j \leq B$, and outputs $z_1 \dots z_B$.

2.2 Oblivious-Access Sort Algorithms

Our construction employs an Oblivious-Access Sort algorithm [BN16] which is, roughly, a RAM program that sorts its input, such that the access patterns of the algorithm on any two inputs of equal size are statistically close. Thus, oblivious-access sort is the “RAM version” of boolean sorting circuits. (Informally, a boolean sorting circuit is a boolean circuit ensemble $\{C(n, B)\}_{n, B}$ such that each $C(n, B)$ takes as input n size- B tagged blocks, and outputs the blocks in sorted order according to their tags.)

Definition 2.3 (Oblivious-Access Sort Algorithm, [BN16]). An *Oblivious-Access Sort* algorithm for input size n and block size B , with complexity $\text{CC}_{\text{Sort}}(n, B)$, is a (possibly randomized) algorithm Sort run by a client C on an input stored remotely on a server S , with the following properties:

- **Operation:** The input consists of n tagged blocks which are represented as length- B bit strings (the tag is a substring of the block) and stored on the server.⁴ The client can perform local bit operations, but can only read and write full blocks from the server.
- **Complexity:** The number of (size- B) blocks read from and written to the remote storage during the execution of Sort is $\text{CC}_{\text{Sort}}(n, B)$.
- **Correctness:** With overwhelming probability in n , at the end of the algorithm the server stores the blocks in sorted order according to their tags.

⁴In [BN16], the blocks consist solely of the tag, but the algorithm is usually run when tags are concatenated with memory blocks (which are carried as a “payload”, and the complexity increases accordingly). We choose to explicitly include the data portion in the block.

- **Oblivious Access:** For a logical memory DB consisting of n blocks of size B , let $AP_{n,B}(\text{Sort}, \text{DB})$ denote the random variable consisting of the list of addresses accessed in a random execution of the algorithm `Sort` on `DB`. Then for every pair `DB, DB'` of inputs with n size- B blocks, $AP_{n,B}(\text{Sort}, \text{DB}) \approx^s AP_{n,B}(\text{Sort}, \text{DB}')$, where \approx^s denotes $\text{negl}(n)$ statistical distance.

Of course, we can directly obtain an oblivious-access sort algorithm from a boolean sorting circuit by emulating the circuit gate-by-gate, where to emulate each gate we bring its inputs from the RAM memory, and store its output back into RAM. However, notice that this naive emulation will blow up the complexity by a factor of w (recall that w denotes the word size of the RAM), because we will need to read the two words that contain the input bits of the gate *in their entirety*. Boyle and Naor [BN16] show a more efficient transformation from sorting circuits to oblivious-access sort algorithms:

Theorem 2.4 (Oblivious-access sort from sorting circuits, [BN16]). *If there exist boolean sorting circuits $\{C(n, B)\}_{n,B}$ of size $s(n, B)$, then there exists an oblivious-access sort algorithm for n distinct elements with $O(1)$ client storage, complexity $O(n \cdot \log B + s(\frac{2n}{B}, B))$, and $e^{-n^{\Omega(1)}}$ probability of error.*

We note that [BN16] show that oblivious-access sort algorithms can be used to construct *offline* ORAM with small overhead. We will show (Section 3) that oblivious-access sort algorithms are useful also in constructing *online* ORAM with small overhead.

Remark on the Existence of Oblivious-Access Sort Algorithms with Small Complexity.

We note that for blocks of poly-logarithmic size $B = \text{poly log } n$, the existence of sorting circuits of size $s(n, B) = O(n \cdot B \cdot \log \log n)$ guarantees (through Theorem 2.4) the existence of oblivious-access sort algorithms with complexity $O(n \cdot \log \log n)$.

Remark on the Relation to Sorting Networks.

The related notion of a *sorting network* has been extensively used in ORAM constructions. Similar to oblivious-access sort algorithms, sorting networks sort n size- B blocks in an oblivious manner. (More specifically, a sorting network is *data oblivious*, namely its memory accesses are independent of the input.) However, unlike oblivious-access sort algorithms, and boolean sorting circuits, which can operate *locally* on the bits in the bit representation of the input blocks, a sorting network consist of a single type of *compare-exchange* gate which takes a pair of blocks as input, and outputs them in sorted order. We note that a simple information-theoretic lower bound of $\Omega(n \log n)$ on the network size is known for sorting networks (as well as matching upper bounds, e.g. [AKS83, Goo14]), whereas no such bound is known for boolean sorting circuits or oblivious-access sorting algorithms.

2.3 Oblivious RAM (ORAM)

Oblivious RAMs were introduced by Goldreich and Ostrovsky [Gol87, Ost90, GO96]. To define oblivious RAMs, we will need the following notation of an *access pattern*.

Notation 2.5 (Access pattern). A length- q *access pattern* Q consists of a list $(\text{op}_l, \text{val}_l, \text{addr}_l)_{1 \leq l \leq q}$ of instructions, where instruction $(\text{op}_l, \text{val}_l, \text{addr}_l)$ denotes that the client performs operation $\text{op}_l \in \{\text{read}, \text{write}\}$ at address addr_l with value val_l (which, if $\text{op}_l = \text{read}$, is \perp).

Definition 2.6 (Oblivious RAM (ORAM)). An *Oblivious RAM (ORAM)* scheme with block size B consists of procedures (`Setup`, `Read`, `Write`), with the following syntax:

- **Setup**($1^\lambda, \text{DB}$) is a function that takes as input a security parameter λ , and a logical memory $\text{DB} \in (\{0, 1\}^B)^n$, and outputs an initial server state st_S and a client key ck . We require that the size of the client key $|\text{ck}|$ be bounded by some fixed polynomial in the security parameter λ , independent of $|\text{DB}|$.
- **Read** is a protocol between the server S and the client C . The client holds as input an address $\text{addr} \in [n]$ and the client key ck , and the server holds its current state st_S . The output of the protocol is a value val to the client, and an updated server state st'_S .
- **Write** is a protocol between the server S and the client C . The client holds as input an address $\text{addr} \in [n]$, a value v , and the client key ck , and the server holds its current state st_S . The output of the protocol is an updated server state st'_S .

Throughout the execution of the **Read** and **Write** protocols, the server is used only as remote storage, and does not perform any computations.

We require the following correctness and security properties.

- **Correctness:** In any execution of the **Setup** algorithm followed by a sequence of **Read** and **Write** protocols between the client and the server, where the **Write** protocols were executed with a sequence V of values, the output of the client in every execution of the **Read** protocol is with overwhelming probability the value he would have read from the logical memory in the corresponding read operation, if the prefix of V performed before the **Read** protocol was performed directly on the logical memory.
- **Security:** For a logical memory DB , and an access pattern Q , let $\text{AP}(\text{DB}, Q)$ denote the random variable consisting of the list of addresses accessed in the ORAM when executing a sequence of **Read** and **Write** protocols according to Q , after the ORAM was initialized using **Setup**.⁵ Then for every pair $\text{DB}^0, \text{DB}^1 \in (\{0, 1\}^B)^n$ of inputs, and any pair $Q^0 = (\text{op}_l, \text{val}_l^0, \text{addr}_l^0)_{1 \leq l \leq q}, Q^1 = (\text{op}_l, \text{val}_l^1, \text{addr}_l^1)_{1 \leq l \leq q}$ of access patterns of length $q = \text{poly}(\lambda)$, $\text{AP}(\text{DB}^0, Q^0) \approx^s \text{AP}(\text{DB}^1, Q^1)$, where \approx^s denotes $\text{negl}(\lambda)$ statistical distance. If $\text{AP}(\text{DB}^0, Q^0), \text{AP}(\text{DB}^1, Q^1)$ are only *computationally* indistinguishable, then we say the scheme is computationally secure.

Definition 2.6 does not explicitly specify who runs the **Setup** procedure. It can be performed by the client, who then sends the server state st_S to the server S , or (to save on client computation) can be delegated to a trusted third party.

Remark 2.7. Notice that Definition 2.6 does not hide whether the performed operation is a **read** or a **write**, whereas an ORAM scheme is usually defined to hide this information. However, any such scheme can be generically made to hide the identity of operations by always performing both a **read** and a **write**. (Specifically, in a **write** operation, one first performs a dummy **read**; in a **read** operation, one writes back the value that was read.) Revealing the identity of operations allows us to obtain more fine-grained overheads.

Remark on Hiding Physical Memory Contents. The security property of Definition 2.6 implicitly assumes that the server does not see the *contents* of the physical memory: if the server is allowed to see it, he might be able to learn some non-trivial information regarding the access

⁵In particular, the accesses performed during **Setup** are *not* included in AP , i.e., it includes only the accesses performed during the **Read** and **Write** executions.

pattern, and thus violate the security property. As noted in Section 1.1, hiding the physical memory contents from the server can be achieved by encrypting the physical memory blocks, but security will then only hold against *computationally-bounded* servers, and so we choose to define security with the implicit assumption that the server does not see the memory contents (which also allows for cleaner constructions).

We will also consider the more restricted notion of a *Read-Only (RO) ORAM* scheme which, roughly, is an ORAM scheme that supports only read operations.

Definition 2.8 (Read-Only Oblivious RAM (RO-ORAM)). A *Read-Only Oblivious RAM (RO-ORAM)* scheme consists of procedures (**Setup**, **Read**) with the same syntax as in Definition 2.6, in which correctness holds for any sequence of **Read** protocols between the client and the server, and security holds for any pair of access patterns R^0, R^1 that contain only read operations.

3 Read-Only ORAM from Oblivious-Access Sort and Smooth LDCs

In this section we construct a Read-Only Oblivious RAM (RO-ORAM) scheme from oblivious-access sort algorithms and smooth LDCs. Concretely, we prove the following:

Theorem 3.1. *Suppose there exist:*

- (k, n, M) -smooth LDCs with $M = \text{poly}(n)$.
- An oblivious-access sort algorithm **Sort** with complexity $s(n, B)$ for input size n and block size B .

Then there exists an RO-ORAM scheme for logical memory of size n and blocks of size $B = \Omega(\lambda \cdot k^2 \cdot \log^3(kn) \log^7 \log(kn))$ with $k + \frac{2k^2}{M} \cdot s(M, B) + O(1)$ overhead, and $O(k)$ client storage.

Theorem 1.1 now follows from Theorem 3.1 (using also Theorem 2.4) for an appropriate instantiation of the sorting algorithm and LDC.

Corollary 3.2 (RO-ORAM, “dream” parameters; formal statement of Theorem 1.1). *Suppose there exist:*

- (k, n, M) -smooth LDCs with $k = O(1)$ and $M = \text{poly}(n)$.
- Boolean sorting circuits $\{C(n, B)\}_{n, B}$ of size $s(n, B) = O(n \cdot B)$ for input size n and block size B .

Then there exists an RO-ORAM scheme for logical memory of size n and blocks of size $\Omega(\lambda \cdot \log^4 n)$ with $O(\log \log n)$ overhead, and $O(1)$ client storage.⁶

We also instantiate our construction with sorting algorithms and LDCs with more “conservative” parameters, to obtain the following corollary.

Corollary 3.3 (RO-ORAM, milder parameters). *Suppose there exist:*

- (k, n, M) -smooth LDCs with $k = \text{poly} \log \log n$ and $M = \text{poly}(n)$.
- Boolean sorting circuits $\{C(n, B)\}_{n, B}$ of size $s(n, B) \in o\left(\frac{n \cdot B \cdot \log n}{k^2}\right)$ for input size n and block size B .

Then there exists an RO-ORAM scheme for memory of size n and blocks of size $\Omega(\lambda \cdot \log^4 n)$ with $o(\log n)$ overhead, and $\text{poly} \log \log n$ client storage.

⁶Recall that the client memory stores blocks of size B . Jumping ahead, for the setting discussed in the theorem statement such blocks are large enough to store the entire client memory needed for the metadata ORAM.

A note on improved block size. As will become evident from the proof, the restriction on the block size in Theorem 3.1 and Corollaries 3.2 and 3.3 results from instantiating the metadata ORAM in Construction 3.4 with path ORAM [SvDS⁺13] (Theorem 3.7). We note that if path ORAM is replaced with optORAMa [AKL⁺20] then the block size could be reduced to roughly $B = \Omega(\lambda k^2 \log^2(kn))$ in Theorem 3.1, and roughly $B = \Omega(\lambda \log^2 n)$ and $B = \lambda \cdot \text{poly} \log \log(n) \cdot \log^2 n$ in corollaries 3.2 and 3.3 (respectively), at the expense of reducing the security of the scheme to hold *computationally* (instead of statistically), and obtaining amortized (instead of worst-case) overhead. This is because optORAMa obtains amortized $\log n$ overhead with blocks of size $\log n$ and $O(1)$ client storage, but only has computational security (whereas path ORAM has larger block size and client memory, but obtains statistical security and worst-case overhead).

Construction Overview. As outlined in the introduction, our construction uses a (k, n, M) -smooth LDC. The server stores k codeword copies, each permuted using a unique uniformly random permutation. To read block j from the logical memory, the client runs the LDC decoder until the decoder generates a set of *fresh* decoding queries (i.e., a set q_1, \dots, q_k of queries such that for every $1 \leq i \leq k$, q_i was not issued before as the i 'th query), and sends these queries to the server. The server uses the i 'th permuted codeword copy to answer the i 'th decoding query. The metadata regarding which decoding queries are fresh, as well as the description of the permutations, are stored on the server using a (polylogarithmic-overhead) ORAM scheme, which the client accesses to determine whether the decoder queries are fresh, and to permute them according to the random permutations.

The execution is divided into “epochs” consisting of $O(M/k)$ read operations. When an epoch ends, the client “refreshes” the permuted codeword copies by picking k fresh, random permutations, and running an oblivious-access sort algorithm with the server to permute the codeword copies stored on the server according to the new permutations. The description of the new permutations is stored in the metadata ORAM (the client also resets the bits indicating which decoding queries are fresh). The refreshing operations are spread-out across the $O(M/k)$ read operations of the epoch. The resultant increase in complexity depends on k (which determines the epoch length, i.e., the frequency in which refreshing is needed), and on the complexity of the oblivious-access sort algorithm.

Construction 3.4 (RO-ORAM from Oblivious-Access Sort and Smooth LDCs). The scheme uses the following building blocks:

- A $(k, n, M)_{\{0,1\}^B}$ -smooth LDC $(\text{Enc}_{\text{LDC}}, \text{Query}_{\text{LDC}}, \text{Dec}_{\text{LDC}})$.
- An oblivious-access sort algorithm Sort .
- An ORAM scheme $(\text{Setup}_{\text{in}}, \text{Read}_{\text{in}}, \text{Write}_{\text{in}})$.

The scheme consists of the following procedures:

- **Setup** $(1^\lambda, \text{DB})$: Recall that λ denotes the security parameter, and $\text{DB} \in (\{0, 1\}^B)^n$. Instantiate the LDC with message size n over alphabet $\Sigma = \{0, 1\}^B$, and let k be the corresponding number of queries, and M be the corresponding codeword size. Proceed as follows.
 1. Counter initialization. Initializes a *step counter* $\text{count} = 0$.
 2. Data storage generation.
 - (a) Generate the codeword $\widetilde{\text{DB}} = \text{Enc}_{\text{LDC}}(\text{DB})$ with $\widetilde{\text{DB}} \in \Sigma^M$.

- (b) For every $1 \leq i \leq k$:
 - Generate a random permutation $P^i : [M] \rightarrow [M]$.
 - Let $\widetilde{\text{DB}}^i \in \Sigma^M$ be a permuted version of the codeword which satisfies $\widetilde{\text{DB}}_{P^i(j)}^i = \widetilde{\text{DB}}_j$ for all $j \in [M]$.
 - 3. Metadata storage generation.
 - (a) For every $1 \leq i \leq k$:
 - Initialize a length- M bit-array Queried^i to $\vec{0}$.
 - Initialize a length- M array Perm^i over $\{0, 1\}^{\log M}$ such that $\text{Perm}^i(j) = P^i(j)$.
 - (b) Let mDB denote the logical memory obtained by concatenating $\text{Queried}^1, \dots, \text{Queried}^k$ and $\text{Perm}^1, \dots, \text{Perm}^k$. Run $(\text{ck}_m, \text{st}_m) \leftarrow \text{Setup}_{\text{in}}(1^\lambda, \text{mDB})$ to obtain the client key and server state for the metadata ORAM.
 - 4. Output. The long-term client key $\text{ck} = \text{ck}_m$ consists of the client key for the metadata ORAM. The server state $\text{st}_S = \left(\left\{ \widetilde{\text{DB}}^i : i \in [k] \right\}, \text{st}_m, \text{count} \right)$ contains the k permuted codewords, the server state for the metadata ORAM, and the step counter.
- **The Read protocol.** To read the logical memory block at location $\text{addr} \in [n]$ from the server S , the client C with key $\text{ck} = \text{ck}_m$ operates as follows, where in all executions of the Read_{in} or Write_{in} protocols on mDB S plays the role of the server with state st_m and C plays the role of the client with key ck_m .

1. Generating decoder queries. Repeat the following λ times:
 - Run $(q_1, \dots, q_k) \leftarrow \text{Query}_{\text{LDC}}(\text{addr})$ to obtain decoding queries.
 - For every $1 \leq i \leq k$, run the Read_{in} protocol to read $\text{Queried}^i[q_i]$. We say that q_i is *fresh* if $\text{Queried}^i[q_i] = 0$.
 - Let $(\hat{q}_1, \dots, \hat{q}_k)$ denote the decoding queries in the first iteration in which all queries were fresh. (If no such iteration exists, set $(\hat{q}_1, \dots, \hat{q}_k)$ to be the decoding queries generated in the last iteration.)
2. Permuting queries. For every $1 \leq i \leq k$, run the Read_{in} protocol to read $\text{Perm}^i[\hat{q}_i]$. Let q'_i denote the value that Read_{in} outputs to the client.
3. Decoding logical memory blocks. Read $\widetilde{\text{DB}}_{q'_1}^1, \dots, \widetilde{\text{DB}}_{q'_k}^k$ from the server, and set the client output to $\text{Dec}_{\text{LDC}}(\widetilde{\text{DB}}_{q'_1}^1, \dots, \widetilde{\text{DB}}_{q'_k}^k)$.
4. Updating counter and server state. Let $\ell = \frac{M}{2k}$. Read count from the server.
 - If $\text{count} < \ell - 1$, then update $\text{count} := \text{count} + 1$, and for every $1 \leq i \leq k$, run the Write_{in} protocol to write “1” to $\text{Queried}^i[\hat{q}_i]$.
 - Otherwise, update $\text{count} := 0$, and for every $1 \leq i \leq k$:
 - * Run the Write_{in} protocol to write $\vec{0}$ to Queried^i .
 - * Replace P^i with a fresh random permutation on $[M]$ by running the Fisher-Yates shuffle algorithm (as presented by Durstenfeld [Dur64]) on Perm^i , using the Read_{in} and Write_{in} protocols.
 - * Use Sort to sort $\widetilde{\text{DB}}^i$ according to the new permutation P^i (each block consists of a codeword symbol, and the index in the codeword which is used as the tag of the block).

If the complexity of these three steps is c_{epoch} , then the client performs c_{epoch}/ℓ steps of this computation in each protocol execution so that it is completed by the end of the epoch.

We prove the following claims about Construction 3.4.

Claim 3.5 (ORAM security). *Assuming the security of all of the building blocks, Construction 3.4 is a secure RO-ORAM scheme.*

Claim 3.6 (ORAM overhead). *Assume that:*

- *The logical memory DB has block size B, and the metadata ORAM has block size mB, satisfying $B > mB \geq \log M$.*
- *The metadata ORAM has overhead $\text{Ovh}(N)$ for memory of size N.*
- *The oblivious-access sort algorithm has complexity $\text{CC}_{\text{Sort}}(n, B)$ when operating on inputs consisting of n size-B blocks.*

Then every execution of the Read protocol in Construction 3.4 requires accessing

$$O(k\lambda + k^2) \cdot mB \cdot \text{Ovh}\left(\frac{k \cdot (M + M \log M)}{mB}\right) + kB + \frac{2k^2}{M} \cdot \text{CC}_{\text{Sort}}(M, B) \cdot \frac{B}{mB}$$

words on the server.

Claims Imply Theorem. To prove Theorem 3.1, we instantiate the metadata ORAM of Construction 3.4 with the following variant of path ORAM [SvDS⁺13]:

Theorem 3.7 (Statistical ORAM with polylog overhead, implicit in [SvDS⁺13]). *Let λ be a security parameter. Then there exists a statistical ORAM scheme with $\text{negl}(\lambda)$ error for logical memory consisting of N blocks of size $mB = \log^2 N \log \log N$ with $O(\log N)$ overhead, in which the client stores $O(\log N (\lambda + \log \log N))$ blocks.*

Moreover, initializing the scheme requires accessing $O(N \cdot mB)$ words, and the server stores $O(N)$ blocks.

Proof of Theorem 3.1. Security follows directly from Claim 3.5 since (as noted in Section 2.1) the existence of a (k, n, M) -smooth LDC implies the existence of a $(k, n, M)_{\{0,1\}^B}$ -smooth LDC.

As for the overhead of the construction, let $N_m = k(M + M \log M)$ denote the size (in bits) of the metadata ORAM. Substituting $mB = \log^2 N_m \log \log N_m$, and $\text{Ovh}(N) = O(\log N)$ (according to Theorem 3.7), Claim 3.6 guarantees that every execution of the Read protocol requires accessing

$$O(k\lambda + k^2) \cdot \log^2 N_m \log \log N_m \cdot O(\log N_m) + kB + \frac{2k^2}{M} \cdot s(M, B) \cdot \frac{B}{mB}$$

words on the server. The first summand can be upper bounded by

$$k^2 \lambda \cdot \log^2(kM) \log^3 \log(kM) \cdot O(\log(kM)) \leq k^2 \lambda \cdot \log^3(kM) \log^3 \log(kM).$$

For $B = \Omega(\lambda \cdot k^2 \cdot \log^3(kn) \log^7 \log(kn))$ (as in the theorem statement) with a sufficiently large constant in the $\Omega(\cdot)$ notation, and since $M = \text{poly}(n)$, this corresponds to accessing $O(B)$ words on the server, so the overhead is $k + \frac{2k^2}{M} \cdot s(M, B) + O(1)$.

Finally, regarding client storage, emulating the LDC decoder requires storing k size-B blocks (i.e, the answers to the decoder queries). Operations on mDB require (by Theorem 3.7) storing $O(\log N_m (\lambda + \log \log N_m))$ size-mB blocks which corresponds to a constant number of size-B blocks. \square

Security Analysis: Proof of Claim 3.5. The proof of Claim 3.5 will use the next lemma, which states that with overwhelming probability, every Read protocol execution uses fresh decoding queries. This follows from the smoothness of the underlying LDC.

Lemma 3.8. *Let $k, M \in \mathbb{N}$, and let $X = (X_1, \dots, X_k)$ be a random variable over $[M]^k$ such that for every $1 \leq i \leq k$, X_i is uniformly distributed over $[M]$. Let $S_1, \dots, S_k \subseteq [M]$ be subsets of size at most ℓ . Then in l independent samples according to X , with probability at least $1 - (k \cdot \frac{\ell}{M})^l$, there exists a sample (x_1, \dots, x_k) such that $x_i \notin S_i$ for every $1 \leq i \leq k$.*

In particular, if $\ell = \frac{M}{2k}$ and $l = \Omega(\lambda)$ then except with probability $\text{negl}(\lambda)$, there exists a sample (x_1, \dots, x_k) such that $x_i \notin S_i$ for every $1 \leq i \leq k$.

Proof. Consider a sample (x_1, \dots, x_k) according to X . Since each X_i is uniformly distributed over $[M]$, then $\Pr[x_i \in S_i] \leq \frac{\ell}{M}$, so by the union bound, $\Pr[\exists i : x_i \in S_i] \leq k \cdot \frac{\ell}{M}$. Since the l samples are independent, the probability that no such sample exists is $(\Pr[\text{in a single sample, } \exists i : x_i \in S_i])^l \leq (k \cdot \frac{\ell}{M})^l$. For the ‘‘in particular’’ part, notice that for $\ell = \frac{M}{2k}$ and $l = \Omega(\lambda)$, $1 - (k \cdot \frac{\ell}{M})^l = 1 - 2^{-\Omega(\lambda)}$. \square

We are now ready to prove Claim 3.5.

Proof of Claim 3.5. The correctness of the scheme follows directly from the correctness of the underlying LDC. We now argue security. Let DB^0, DB^1 be two logical memories consisting of n size- B blocks, and let R^0, R^1 be two sequences of read operations of length $q = \text{poly}(\lambda)$. We proceed via a sequence of hybrids. We assume that in each read operation, at least one iteration in the Read protocol succeeded in generating fresh decoder queries, and condition all hybrids on this event. This is without loss of generality since by Lemma 3.8, this happens with overwhelming probability.

\mathcal{H}_0^b : Hybrid \mathcal{H}_0^b is the access pattern $\text{AP}(\text{DB}^b, R^b)$ in an execution of read sequence R^b on the RO-ORAM generated for logical memory DB^b .

\mathcal{H}_1^b : In hybrid \mathcal{H}_1^b , for every $1 \leq i \leq k$, we replace the values of Queried^i and Perm^i with dummy values of (e.g.,) the all-0 string. Moreover, we replace all read and write accesses to the metadata mDB with dummy operations that (e.g.,) read and write the all-0 string to the first location in the metadata. (We note that the accesses to the permuted codewords remain unchanged, where each access consists of fresh decoding queries, permuted according to P^1, \dots, P^k .)

Hybrids \mathcal{H}_0^b and \mathcal{H}_1^b are statistically indistinguishable by the security of the metadata ORAM.

\mathcal{H}_2^b : In hybrid \mathcal{H}_2^b , for every $1 \leq i \leq k$, and every epoch j , we replace the permutation on which the oblivious-access sort algorithm Sort is applied, with a dummy permutation (e.g., the identity). (As in \mathcal{H}_1^b , the accesses to the codeword copies remain unchanged, and in particular the ‘‘right’’ permutations are used in all epochs.)

Hybrids \mathcal{H}_1^b and \mathcal{H}_2^b are statistically indistinguishable by the obliviousness property of the oblivious-access sort algorithm.

\mathcal{H}_3^b : In hybrid \mathcal{H}_3^b , for every $1 \leq i \leq k$, we replace the queries to the i 'th permuted codeword with queries that are uniformly random subject to the constraint that they are all distinct.

Hybrids \mathcal{H}_2^b and \mathcal{H}_3^b are statistically indistinguishable since by our assumption all the queries sent to the codeword copies are fresh, and they are permuted using random permutations. (Notice that $\mathcal{H}_2^b, \mathcal{H}_3^b$ contain no additional information regarding these permutations.)

We conclude the proof by noting that $\mathcal{H}_3^0 \equiv \mathcal{H}_3^1$ since neither depend on $\text{DB}^0, \text{DB}^1, R^0$ or R^1 . \square

Complexity Analysis: Proof of Claim 3.6. We now analyze the complexity of Construction 3.4, proving Claim 3.6. Notice that since $\mathbf{mB} \geq \log M$, an image of any random permutation $P^i : [M] \rightarrow [M]$ is contained in a single block of \mathbf{mB} . Notice also that the metadata \mathbf{mDB} consists of $k \cdot (M + M \log M)$ bits, and let $N_m := \frac{k \cdot (M + M \log M)}{\mathbf{mB}}$ denote its size in size- \mathbf{mB} blocks. Recall that a word (i.e., the basic unit of the physical memory stored on the server) consists of w bits.

Proof of Claim 3.6. Every execution of the Read protocol consists of the following operations:

- Reading $k \cdot \lambda$ bits from \mathbf{mDB} to check if the decoding queries in each of the λ iterations are fresh. In the worst case, reading each bit requires reading a different block from \mathbf{mDB} , which requires accessing $k\lambda \cdot \mathbf{mB} \cdot \text{Ovh}(N_m)$ words on the server.
- Reading k images from $\text{Perm}^1, \dots, \text{Perm}^k$ to permute the chosen decoding queries. This requires reading k blocks from \mathbf{mDB} , which requires accessing $k \cdot \mathbf{mB} \cdot \text{Ovh}(N_m)$ words on the server.
- Reading k blocks from the permuted codewords $\widetilde{\text{DB}}^1, \dots, \widetilde{\text{DB}}^k$ to answer the decoder queries, which requires accessing $\frac{\mathbf{B}}{w} \cdot k$ words on the server.
- Writing k bits to \mathbf{mDB} to update the values $\text{Queried}^i[\hat{q}^i], 1 \leq i \leq k$, to 1, in total accessing $k \cdot \mathbf{mB} \cdot \text{Ovh}(N_m)$ words on the server. (This operation is only performed when $\text{count} < \ell - 1$, but counting it in *every* Read execution will not increase the overall asymptotic complexity.)
- Updating the counter, which requires accessing $\frac{\lambda}{w}$ words on the server.⁷

In total, these operations require accessing $O(k\lambda) \cdot \mathbf{mB} \cdot \text{Ovh}(N_m) + k \cdot \frac{\mathbf{B}}{w}$ words on the server.

In addition, every Read execution performs its “share” of the operations needed to update the server state at the end of the epoch. More specifically, it performs a $\frac{1}{\ell} = \frac{2k}{M}$ -fraction of the following operations:

- Updating the metadata ORAM, which requires the following. First, writing $k \cdot \frac{M}{\mathbf{mB}}$ blocks to \mathbf{mDB} to reset all entries of $\text{Queried}^i, 1 \leq i \leq k$. Second, reading and writing $k \cdot 2M$ blocks to \mathbf{mDB} to update the entries of $\text{Perm}^i, 1 \leq i \leq k$ with the images of the new permutations (this is done using the Fisher-Yates shuffle). In total, these update operations require accessing $k \cdot M \cdot \left(\frac{1}{\mathbf{mB}} + 4\right) \cdot \mathbf{mB} \cdot \text{Ovh}(N_m)$ words on the server.
- Running k executions of Sort on an input of M blocks of size \mathbf{B} to re-permute the codeword copies, which requires accessing $k \cdot \text{CC}_{\text{Sort}}(M, \mathbf{B})$ blocks on the server, i.e., $k \cdot \text{CC}_{\text{Sort}}(M, \mathbf{B}) \cdot \frac{\mathbf{B}}{\mathbf{mB}}$ words on the server.

So these update operations require accessing $O(k^2) \cdot \mathbf{mB} \cdot \text{Ovh}(N_m) + \frac{2k^2}{M} \cdot \text{CC}_{\text{Sort}}(M, \mathbf{B}) \cdot \frac{\mathbf{B}}{\mathbf{mB}}$ words on the server per execution of the Read protocol.

In summary, reading a single logical block from DB requires accessing $O(k\lambda + k^2) \cdot \mathbf{mB} \cdot \text{Ovh}\left(\frac{k \cdot (M + M \log M)}{\mathbf{mB}}\right) + \frac{k}{w} \mathbf{B} + \frac{2k^2}{M} \cdot \text{CC}_{\text{Sort}}(M, \mathbf{B}) \cdot \frac{\mathbf{B}}{\mathbf{mB}}$ words on the server. \square

⁷Here, we assume $\lambda \geq \log M/2k$, which is the number of bits needed to represent the counter.

3.1 Read-Only ORAM with Oblivious Setup

In this section we generalize the notion of an RO-ORAM scheme to allow the client to run the ORAM Setup algorithm, using the server as remote storage, when the logical memory is already stored at the server. We call this primitive an *RO-ORAM scheme with oblivious setup*,⁸ and show that the RO-ORAM scheme of Construction 3.4 extends to this setting. This primitive will be used in the next section to construct an ORAM scheme supporting writes with low read overhead.

At a high level, an RO-ORAM scheme with oblivious setup is an RO-ORAM scheme (Setup, Read) associated with an additional protocol OblSetup which allows the client to execute the Setup algorithm using the server as remote storage when the logical memory is already stored on the server, where the execution is oblivious in the sense that the scheme remains secure when the RO-ORAM is generated using OblSetup instead of Setup. Formally,

Definition 3.9 (RO-ORAM with oblivious setup). An RO-ORAM scheme *with oblivious setup* is an RO-ORAM scheme (Setup, Read), associated with an additional OblSetup protocol between the client C and the server S , where:

- The server holds as input a logical memory $DB \in (\{0, 1\}^B)^n$, and both parties hold 1^λ as input.
- The correctness and security properties of Definition 2.8 hold.
- The correctness property of Definition 2.8 holds when the RO-ORAM is instantiated with OblSetup instead of Setup.
- The security property of Definition 2.8 holds when the ORAM is generated using OblSetup instead of Setup, and when the access patterns $AP(DB^b, R^b)$, $b \in \{0, 1\}$ include also the accesses performed during the execution of OblSetup.

Next, we show that the RO-ORAM scheme of Construction 3.4 has oblivious setup. The oblivious setup protocol relies on the building blocks of Construction 3.4, and additionally uses a CPA-secure symmetric encryption scheme (whose existence follows from the existence of OWFs).

The high-level idea is conceptually simple. The client first encrypts the logical memory, then generates the codeword copies by encoding the *encrypted* logical memory. This can be done by running the encoding procedure of the LDC “in the clear” (using the server as remote storage), because by the CPA-security of the encryption scheme, the access pattern of the encoding procedure reveals no information on the logical memory. (Indeed, the access pattern might depend on the *values of the ciphertexts*, but those are computationally indistinguishable from encryptions of 0.) Then, the client can use an “empty” metadata (initialized to $\bar{0}$) to generate his keys for the metadata ORAM, and update its contents by running the Write protocol of the metadata ORAM together with the server. Finally, the codeword copies can be obliviously permuted using the oblivious-access sort algorithm. This high-level intuition is formalized in the following construction.

Construction 3.10 (RO-ORAM with Oblivious Setup). The RO-ORAM scheme (Setup', Read', OblSetup) is obtained from Construction 3.4 using a CPA-secure encryption scheme. We use the notation of Construction 3.4 (e.g., for the LDC parameters).

- **Setup'** ($1^\lambda, DB$) is obtained from the Setup algorithm of Construction 3.4 by replacing Step 2a with the following: generate an encryption key $sk \leftarrow \text{KeyGen}(1^\lambda)$, encrypt the logical memory $\widehat{DB} \leftarrow \text{Enc}_{SE}(sk, DB)$, and generate the codeword $\widetilde{DB} = \text{Enc}_{LDC}(\widehat{DB})$ with $\widetilde{DB} \in \Sigma^M$.

⁸We could have similarly defined this notion as an extension of ORAM schemes (that support write operations), but since we only use this property for RO-ORAM schemes, we choose to define it for this (more restricted) setting.

Additionally, the client key which **Setup** outputs in Step 4 is $\text{ck} = (\text{sk}, \text{ck}_m)$, and the server state is $\left(\left\{\widetilde{\text{DB}}^i : i \in [k]\right\}, \text{st}_m, \text{count}, \text{DB}\right)$. (Notice that the server stores the logical memory. This will be used in **ObSetup**, which assumes the server already stores the logical memory.)

- **Read'** is obtained from the **Read** algorithm of Construction 3.4 by replacing Step 3 with the following: read $\widetilde{\text{DB}}_{q'_1}^1, \dots, \widetilde{\text{DB}}_{q'_k}^k$ from the server, decode $\text{val} = \text{Dec}_{\text{LDC}}\left(\widetilde{\text{DB}}_{q'_1}^1, \dots, \widetilde{\text{DB}}_{q'_k}^k\right)$, and set the client output to $\text{Dec}_{\text{SE}}(\text{sk}, \text{val})$.
- **ObSetup** is run between the client C , and the server S . Both parties have 1^λ as input, and the server also stores $\text{DB} \in (\{0, 1\}^B)^n$. The protocol is executed as follows:
 - The client initializes the step counter $\text{count} = 0$, and generates an encryption key $\text{sk} \leftarrow \text{KeyGen}(1^\lambda)$. Additionally, the client initializes a metadata ORAM with $\frac{k(M+\log M)}{mB}$ size- mB empty blocks (initialized to 0), by running $(\text{ck}_m, \text{st}_m) \leftarrow \text{Setup}_{\text{in}}(1^\lambda, mB)$, and sends st_m to the server.
 - The client encrypts the logical memory $\widehat{\text{DB}} \leftarrow \text{Enc}_{\text{SE}}(\text{sk}, \text{DB})$ (the blocks are encrypted one-by-one, using the server as remote storage).
 - The client encodes the encrypted logical memory $\widetilde{\text{DB}} = \text{Enc}_{\text{LDC}}(\widehat{\text{DB}})$ (using the server as remote storage), and stores k copies $\widetilde{\text{DB}}^i, i \in [k]$ of $\widetilde{\text{DB}}$ on the server.
 - For every $1 \leq i \leq k$, the client and server:
 - * Write $\vec{0}$ to Queried^i , using the Write_{in} protocol.
 - * Write a fresh random permutation $P^i : [M] \rightarrow [M]$ to Perm^i by running the Fisher-Yates shuffle algorithm (as presented by Durstenfeld [Dur64]) on Perm^i , using the Read_{in} and Write_{in} protocols.
 - * Use Sort to sort $\widetilde{\text{DB}}^i$ according to the new permutation P^i (each block consists of a codeword symbol, and the index in the codeword which is used as the tag of the block).
 - The output to the client is $\text{ck} = (\text{sk}, \text{ck}_m)$, and the output to the server is $\left(\left\{\widetilde{\text{DB}}^i\right\}_{i \in [k]}, \text{st}'_m, \text{count}, \text{DB}\right)$, where st'_m denote the updated state of the server in the metadata ORAM at the end of this protocol. (Notice that the server stores the logical memory. This will be used in subsequent executions of **ObSetup**.)

We show that Construction 3.10 is an RO-ORAM scheme with oblivious setup, namely:

Lemma 3.11 (RO-ORAM with oblivious setup). *Assuming the security of the building blocks of Construction 3.4, and the CPA-security of the encryption scheme, Construction 3.10 is a computationally-secure RO-ORAM scheme with oblivious setup.*

Proof. The correctness of the scheme (when it is initialized with either **Setup** or **ObSetup**) follows from the correctness of the underlying metadata ORAM scheme, the correctness of the oblivious-access sort algorithm and encryption scheme, and the description of **Setup'**, **Read'** and **ObSetup**.

As for security, when the scheme is initialized with the **Setup** algorithm, security follows similarly to Claim 3.5 (the only difference is that here the logical memory is first encrypted, but that does not affect the proof). As for the case when the scheme is initialized with **ObSetup**, let DB^0, DB^1 be a pair of logical memories, let R^0, R^1 be a pair of sequences of read operations of equal length, and let AP^0, AP^1 denote the distributions over access patterns generated during the

execution of ObISetup on DB^0, DB^1 (respectively), followed by executions of the Read protocol to perform the sequences R^0, R^1 (respectively). Since the generation of the encryption key, the random permutations, the metadata mDB , and the update operations performed on the metadata ORAM during ObISetup , are independent of the contents of the logical memory and the read sequences, we can condition both distributions AP^0, AP^1 on these values. Next, the CPA-security of the encryption scheme guarantees that the memory accesses during encoding of DB^0, DB^1 are computationally indistinguishable. (Indeed, the memory accesses depend only on the *encryptions* of DB^0, DB^1 , which are computationally indistinguishable from encryptions of 0.) Moreover, the obliviousness of the oblivious-access sort algorithm guarantees that the access patterns during sorting of the codewords are statistically close. Consequently, the memory accesses throughout the execution of ObISetup on DB^0, DB^1 are computationally indistinguishable. Finally, we claim that the memory accesses caused by the read sequences are computationally close. To see why this holds, notice that the only difference between the ORAMs after ObISetup is in the contents of the codeword copies. However, these anyway do not affect the execution of the Read protocol of Construction 3.4 (since the LDC decoder queries are independent of the codeword contents), and so the two sequences of Read protocol executions are statistically close by the security of Construction 3.4. \square

Lemma 3.12 (Complexity of oblivious setup). *Assume that:*

- The logical memory DB has block size B , and the metadata ORAM has block size mB , satisfying $\text{B} > \text{mB} \geq \log M$.
- The metadata ORAM has $\text{Ovh}(N)$ overhead for memories of size N , and its setup algorithm can be executed using the server as remote storage by accessing $T_m(N)$ words on the server, where the client (server) stores s_C (s_S) size- mB blocks.
- The oblivious-access sort algorithm has complexity $\text{CC}_{\text{Sort}}(n, \text{B})$ when operating on inputs consisting of n size- B blocks.
- The LDC has query complexity k , codeword length M , and on messages of length n its encoding procedure performs $T_{\text{LDC}}(n)$ operations (i.e., touches $T_{\text{LDC}}(n)$ message symbols).

Then the ObISetup protocol of Construction 3.10 accesses

$$\begin{aligned} & \lambda + T_m \left(\frac{k(M + M \log M)}{\text{mB}} \right) + 2n \cdot \frac{\text{B}}{w} + T_{\text{LDC}}(n) \cdot \frac{\text{B}}{w} + kM \cdot \frac{\text{B}}{w} \\ & + \left(\frac{kM}{\text{mB}} + kM \right) \cdot \text{mB} \cdot \text{Ovh} \left(\frac{k(M + M \log M)}{\text{mB}} \right) + k \cdot \text{CC}_{\text{Sort}}(n, \text{B}) \cdot \frac{\text{B}}{\text{mB}} \end{aligned}$$

words on the server, where w denotes the word size. Moreover, the client stores $s_C \cdot \frac{\text{mB}}{\text{B}}$ size- B blocks, and the server stores $n + kM + s_S \cdot \frac{\text{mB}}{\text{B}} + \lambda$ size- B blocks.

Proof. The storage complexity of the client and server follows directly from the assumptions of the lemma, and the description of the ObISetup algorithm.

As for the complexity of ObISetup , initializing the metadata ORAM requires accessing $T_m(N)$ words on the server, where $N := \frac{k(M + M \log M)}{\text{mB}}$ denotes the size of mDB in size- mB blocks. Initializing the step counter requires accessing at most λ words on the server (since a λ -bit counter can count any arbitrary polynomial number of steps).

Encrypting the logical memory requires reading and writing each logical memory block once, for a total of $2n \cdot \frac{\text{B}}{w}$ words on the server. Generating the codeword requires accessing $T_{\text{LDC}}(n) \cdot \frac{\text{B}}{w}$

words on the server, and the length- M codeword is duplicated k times, so generating the codeword copies requires accessing $T_{\text{LDC}}(n) \frac{B}{w} + kM \cdot \frac{B}{w}$ words on the server.

Updating the metadata contents requires writing $\frac{kM}{mB} + kM$ blocks to $m\text{DB}$ (since Queried^i can be updated by writing $\frac{kM}{mB}$ $\vec{0}$ -blocks, and each image of a permutation P^i has size $\log M \leq mB$). Therefore, updating the metadata ORAM requires accessing $(\frac{kM}{mB} + kM) \cdot mB \cdot \text{Ovh}(N)$ words.

Finally, permuting the codeword copies requires accessing $k \cdot \text{CC}_{\text{Sort}}(n, B)$ blocks, i.e., accessing $k \cdot \text{CC}_{\text{Sort}}(n, B) \cdot \frac{B}{mB}$ words on the server. \square

A Note on Statistically-Secure RO-ORAM with Oblivious Setup. The RO-ORAM with oblivious setup scheme of Construction 3.10 is computationally-secure (even if the server is not allowed to see the memory contents). This is due to the fact that the access pattern during LDC-encoding might depend on the contents of the message being encoded, which in our case is the encrypted contents of the logical memory. Since the encryptions of two logical memories are only computationally indistinguishable, the resultant security is computational. We note, however, that in some cases one can forgo the encryption in the OblSetup protocol of Construction 3.10, and obtain a *statistically secure* scheme. Indeed, suppose we run the OblSetup protocol without encrypting the logical memory. The only step whose access pattern *might* depend on the input is the step in which the logical memory is encoded. In particular, if we have an LDC in which the access pattern during encoding is independent of the message being encoded, then the resultant protocol would be oblivious (even though we have not encrypted the logical memory before encoding it). This is indeed the case for, e.g., linear LDCs, since encoding is done by multiplying the message by the generator matrix, so the access pattern during encoding is independent of the message. Consequently, instantiating Construction 3.10 with a linear LDC with the parameters specified in Lemma 3.12, would give a statistically-secure ORAM with oblivious setup, with the complexity specified in Lemma 3.12.

4 Oblivious RAM Supporting Writes with $o(\log n)$ Read Complexity

In this section we extend the RO-ORAM scheme of Section 3 to support writes, while preserving the overhead of read operations. We instantiate our construction in several parameter regimes, obtaining the following results.

First, by instantiating our construction with “best possible” sorting circuits and LDCs, we prove Theorem 1.2:

Theorem 4.1 (ORAM, “dream” parameters; formal statement of Theorem 1.2). *Assume the existence of OWFs, as well as LDCs and sorting circuits as in Corollary 3.2, where the LDC has the following additional properties:*

- $M = n^{1+\delta}$ for some $\delta \in (0, 1)$.
- Encoding requires $M^{1+\gamma}$ operations over size- B blocks, for some $\gamma \in (0, 1)$.

Then there exists an ORAM scheme for memories of size n and blocks of size $B = \Omega(\lambda \cdot \log^3 n \log^7 \log n)$ with $O(1)$ client storage, where read operations have $O(\log \log n)$ overhead, and write operations have $O(n^\epsilon)$ overhead for any constant $\epsilon \in (0, 1)$ such that $\epsilon > \delta + \gamma + \delta\gamma$.

Using milder assumptions regarding the parameters of the underlying sorting circuit and LDC, we can prove the following:

Theorem 4.2 (ORAM, milder parameters). *Assume the existence of OWFs, as well as LDCs and sorting circuits as in Corollary 3.3, where the LDC has the additional properties specified in Theorem 4.1. Then there exists an ORAM scheme for memories of size n and blocks of size $B = \Omega(\lambda \cdot \log^3 n \log^7 \log n)$ with poly $\log \log n$ client storage, where read operations have $o(\log n)$ overhead, and write operations have $O(n^\epsilon)$ overhead for any constant $\epsilon \in (0, 1)$ such that $\epsilon > \delta + \gamma + \delta\gamma$.*

Finally, we also obtain a scheme with improved write overhead, by somewhat strengthening the assumptions regarding the LDC.

Theorem 4.3 (ORAM, low write overhead; formal statement of Theorem 1.3). *Assume the existence of OWFs, as well as LDCs and sorting circuits as in Corollary 3.2, where the LDC has the following additional properties:*

- $M = n^{1+o(1)}$.
- Encoding requires $M^{1+o(1)}$ operations over size- B blocks.

Then there exists an ORAM scheme for memories of size n and blocks of size $B = \Omega(\lambda \cdot \log^3 n \log^7 \log n)$ with $O(1)$ client storage, where read operations have $o(\log n)$ overhead, and write operations have $n^{o(1)}$ overhead.


Construction Overview. As outlined in Section 1.2.2, the ORAM consists of ℓ levels of increasing size (growing from top to bottom), where initially the logical memory is stored in the lowest level, and all other levels are empty. read operations look for the memory block in all levels, returning the top-most copy of the block, and write operations write the memory block to the top-most level, causing a reshuffle at predefined intervals to prevent levels from overflowing.

Transforming this high-level intuition into an actual scheme requires some adjustments. First, our RO-ORAM scheme⁹ was designed for logical memories given as array data structures (namely, in which blocks can only be accessed by specifying the location of the block in the logical memory), but upper levels are too small to contain the entire logical memory, namely they require RO-ORAM schemes for *map data structure*.¹⁰ To overcome this issue, we associate with each level i an array \mathcal{DB}^i that contains the memory blocks of level i , and is stored in an RO-ORAM \mathcal{O}^i (for array data structures). Additionally, we store the metadata regarding which block appears in which array location in a (standard, polylogarithmic-overhead) ORAM \mathcal{MO}^i for map structures. Thus, to look for block j in level i , the client first searches for j in \mathcal{MO}^i . If the j 'th memory block appears in level i , then \mathcal{MO}^i returns the location t in which it appears in \mathcal{DB}^i , and so the client can read the block by performing a read for address t on the RO-ORAM \mathcal{O}^i of the level.

Second, to allow for efficient “reshuffling” of level i (which, in particular, requires a traversal of both \mathcal{DB}^i and \mathcal{DB}^{i+1}), we also store \mathcal{DB}^i in every level i . Thus, every level i contains the array \mathcal{DB}^i , the metadata ORAM \mathcal{MO}^i which maps blocks to their locations in \mathcal{DB}^i , and the RO-ORAM \mathcal{O}^i which stores \mathcal{DB}^i . We note that the metadata ORAM is not needed in the lowest level, because the structure will preserve the invariant that \mathcal{DB}^ℓ contains all the blocks “in order” (namely, the k 'th block of the logical memory is the k 'th block of \mathcal{DB}^ℓ). This structure is presented in Figure 1.

⁹The construction can use any RO-ORAM scheme, but the read overhead is at least the overhead of the RO-ORAM scheme. Therefore, to obtain $o(\log n)$ overhead, we need to instantiate the ORAM with our RO-ORAM scheme.

¹⁰We note that several ORAM schemes (such as tree-based ORAM schemes, and in particular the ORAM of Theorem 3.7), though described for logical memories given as arrays, can actually support logical memories given as map data structures.

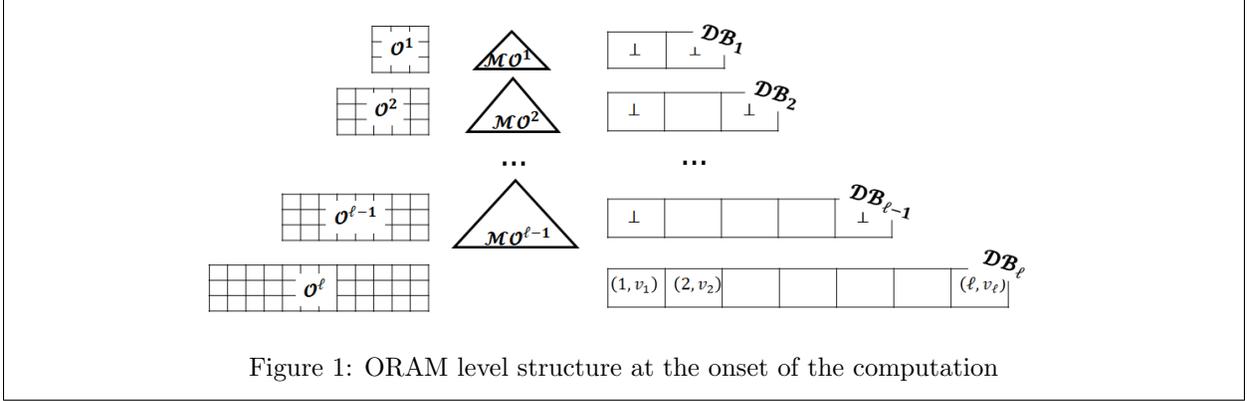

Finally, every “reshuffle” of level i into level $i + 1$ requires re-generation of the RO-ORAM \mathcal{O}^{i+1} , since the contents of \mathcal{DB}^{i+1} have changed. In general, re-generation cannot use the setup algorithm of the RO-ORAM due to two reasons. First, the setup is designed to be run by a trusted party, and so the server cannot run it, and since setup depends on the entire logical memory, it is too costly for the client to run on his own. Second, while the setup of an RO-ORAM is only required to be polynomial-time (since it is only executed once, and so its cost is amortized over sufficiently many accesses to the RO-ORAM), when executed repeatedly as part of reshuffle, a more stringent efficiency requirement is needed. The first property is captured by the ORAM with oblivious setup primitive (Section 3.1). For the second property we use the fact that our RO-ORAM scheme described in Section 3 has a highly-efficient oblivious setup protocol (as described in Section 3.1).

Given these building blocks, the ORAM operates as follows. To read the j 'th logical memory block, the client looks for the block in every level. At the lowest level ℓ , which contains the entire logical memory, this is done by reading the block at address j from \mathcal{O}^ℓ . For all other levels $1 \leq i < \ell$, this is done by first reading j from \mathcal{MO}^i to check whether the j 'th memory block appears in \mathcal{DB}^i , and if so in which index t ; and then using \mathcal{O}^i to read the t 'th block of \mathcal{DB}^i . (If the j 'th block does not appear in \mathcal{DB}^i , a dummy read is performed on \mathcal{O}^i .) The output is the copy of block j from \mathcal{DB}^{i^*} for the smallest level i^* such that \mathcal{DB}^{i^*} contains the j 'th memory block. This is the “correct” answer because the levels preserve the invariant that each level contains at most one copy of each logical memory block, and the most recent copy appears in the top-most level that contains the block. An example of the execution of the read protocol is presented in Figure 2.

To write value v to the block at address j , the client asks the server to write a new copy of block j with value v to the top level. As noted above, this causes a reshuffle into lower levels at predefined intervals to prevent levels from overflowing. More specifically, every l_i write operations level i will be reshuffled into level $i + 1$, where l_i denotes the size of level i . During reshuffle, all memory blocks from \mathcal{DB}^i are copied into \mathcal{DB}^{i+1} , and multiple copies of the same memory block are consolidated by storing the level- i copy. Additionally, the ORAMs $\mathcal{MO}^{i+1}, \mathcal{O}^{i+1}$ of level $i + 1$ are updated, and level i is emptied (that is, \mathcal{DB}^i is replaced with an empty array, and $\mathcal{MO}^i, \mathcal{O}^i$ are updated accordingly). See Figures 4 (page 27) and 6 (page 29) for an example.

Instantiating this ORAM scheme with different values of the number of levels ℓ yields ORAM schemes with different tradeoffs between the read and write overhead. Concretely, Theorems 4.1 and 4.2 are obtained by setting ℓ to be constant, and Theorem 4.3 is obtained by setting $\ell = \frac{\log n}{\log^2 \log n}$.

We now formally describe the construction.

Construction 4.4 (ORAM with writes). The scheme uses the following building blocks:

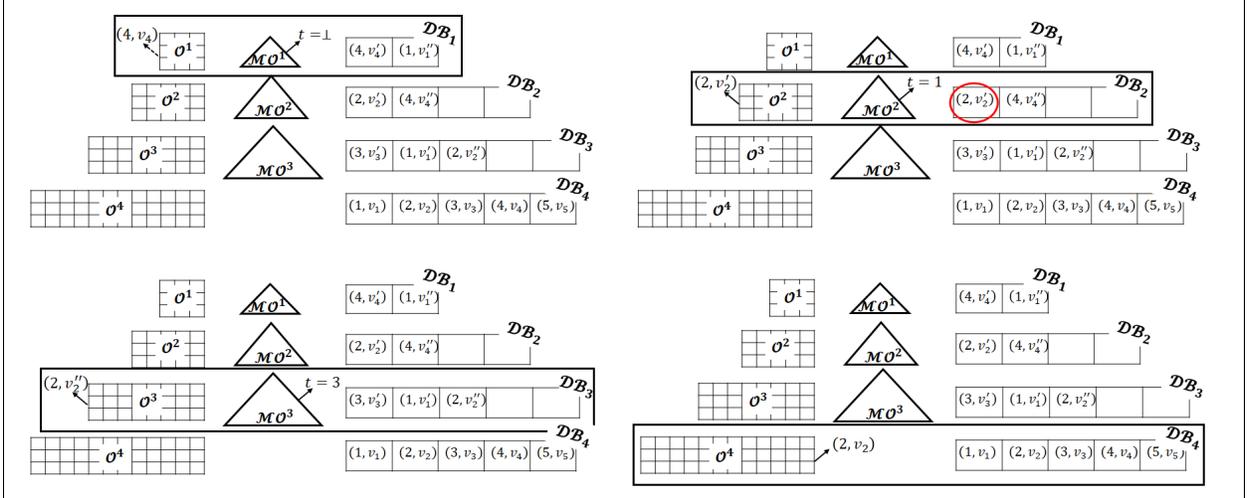


Figure 2: Read execution for $\text{addr} = 2$ in a toy-example ORAM with logical memory size $n = 5$ and $\ell = 4$ levels. The frame indicates the level which is currently accessed, and the red circle denotes the output of the protocol. Arrows denote the output of the metadata and RO ORAMs, where dashes arrows denote dummy accesses. In level 1 (top left) \mathcal{MO}^1 is accessed and returns $t = \perp$ indicating that the second block is not in \mathcal{DB}^1 , so a dummy access is performed on \mathcal{O}^1 . In level 2 (top right), \mathcal{MO}^2 returns $t = 1$, indicating that block 2 appears as the first block of \mathcal{DB}^2 . \mathcal{O}^2 is then accessed to retrieve the first block $(2, v'_2)$ of \mathcal{DB}^2 . This block is returned as the output, since higher levels (level 1) do not contain the block. To preserve obliviousness, lower levels are still accessed. In level 3 (bottom left), \mathcal{MO}^3 returns $t = 3$, indicating that block 2 appears as the third block of \mathcal{DB}^3 . \mathcal{O}^3 is then accessed to retrieve the third block $(2, v''_2)$ of \mathcal{DB}^3 , but this block is then discarded because a copy of the block already appears at a higher level. Finally, in level 4 (bottom right), \mathcal{O}^4 is accessed to retrieve the second block $(2, v_2)$ of \mathcal{DB}^4 , which is also discarded.

- An RO-ORAM scheme with oblivious setup ($\text{Setup}_R, \text{Read}_R, \text{ObfSetup}_R$).
- An ORAM scheme ($\text{Setup}_m, \text{Read}_m, \text{Write}_m$) for map data structures.

We define the following protocols.

- **Setup**($1^\lambda, \text{DB}$): Recall that λ denotes the security parameter, and $\text{DB} \in (\{0, 1\}^B)^n$. Setup does the following.
 - Initialize a writes counter. Initialize a writes counter count to 0.
 - Initialize lowest level.
 - * Initialize $\mathcal{DB}^\ell = \text{DB}$. We assume without loss of generality that the blocks in DB are of the form (j, b_j) , namely each logical memory block contains its logical address.¹¹
 - * Generate an RO-ORAM scheme \mathcal{O}^ℓ for \mathcal{DB}^ℓ by running $(\text{ck}_R^\ell, \text{st}_R^\ell) \leftarrow \text{Setup}_R(1^\lambda, \mathcal{DB}^\ell)$ to obtain a client key ck_R^ℓ and a server state st_R^ℓ for \mathcal{O}^ℓ .
 - Initialize upper levels. For every level $1 \leq i < \ell$:
 - * Initialize \mathcal{DB}^i to consist of l_i dummy memory blocks.

¹¹This assumption is without loss of generality since for the block sizes we consider, concatenating the address to the block would cause at most a constant multiplicative increase in the block size.

- * Generate an RO-ORAM scheme \mathcal{O}^i for \mathcal{DB}^i by running $(\text{ck}_R^i, \text{st}_R^i) \leftarrow \text{Setup}_R(1^\lambda, \mathcal{DB}^i)$ to obtain a client key ck_R^i and a server state st_R^i for \mathcal{O}^i .
 - * Generate a map data structure \mathcal{M}^i mapping each block (j, b_j) in \mathcal{DB}^i to its index in \mathcal{DB}^i . (That is, if (j, b_j) is the t 'th block of \mathcal{DB}^i then the entry (t, j) is added to \mathcal{M}^i .)
 - * Generate a metadata ORAM scheme \mathcal{MO}^i for \mathcal{M}^i , by running $(\text{ck}_m^i, \text{st}_m^i) \leftarrow \text{Setup}_m(1^\lambda, \mathcal{M}^i)$ to obtain the client key and server state for \mathcal{MO}^i .
- Output. The long-term client key $\text{ck} = (\text{ck}_R^\ell, \{\text{ck}_R^i, \text{ck}_m^i\}_{i \in [\ell-1]})$ consists of the client keys for the RO-ORAMs \mathcal{O}^i and the metadata ORAMs \mathcal{MO}^i of all levels. The server state $\text{st}_S = (\text{count}, \text{st}_R^\ell, \mathcal{DB}^\ell, \{\text{st}_R^i, \text{st}_m^i, \mathcal{DB}^i\}_{i \in [\ell-1]})$ contains the counter count of the number of write operations performed, the server states in the RO-ORAMs \mathcal{O}^i and the metadata ORAMs \mathcal{MO}^i of all levels, as well as the memory contents \mathcal{DB}^i of all levels.

The Read protocol. To read the logical memory block at location $\text{addr} \in [n]$ from the server S , the client C with key $(\text{ck}_R^\ell, \{\text{ck}_R^i, \text{ck}_m^i\}_{i \in [\ell-1]})$ operates as follows, where in all executions of the Read_R protocol on \mathcal{O}^i (respectively, all executions of the Read_m or Write_m protocols on \mathcal{MO}^i) S plays the role of the server with state st_R^i (respectively, st_m^i) and C plays the role of the client with key ck_R^i (respectively, ck_m^i).

- Determine block location in level i . For every level $1 \leq i \leq \ell - 1$, run the Read_m protocol on \mathcal{MO}^i to read the index l in which the block appears in \mathcal{DB}^i . (If block addr does not appear in level i , then $l = \perp$.)
- Read block from level i . For every level $1 \leq i \leq \ell - 1$, if $l = \perp$, set $l = 1$. Run the Read_R protocol on \mathcal{O}^i to read the l 'th block from \mathcal{DB}^i .
- Read block from level ℓ . Run the Read_R protocol on \mathcal{O}^ℓ to read the addr 'th block from \mathcal{DB}^ℓ .
- Output. Let i^* be the smallest such that block addr appears in \mathcal{DB}^{i^*} , and let (addr, v) denote the block returned by the execution of the Read_R protocol on \mathcal{O}^{i^*} . Output v to C . (All other memory blocks returned by the Read_R protocol executions are ignored.)

The Write protocol. To write value val to block $\text{addr} \in [n]$ in the logical memory, the client C with key $(\text{ck}_R^\ell, \{\text{ck}_R^i, \text{ck}_m^i\}_{i \in [\ell-1]})$ operates as follows.

- Generate a “dummy” level 0 which contains a single memory block $(\text{addr}, \text{val})$, and send it to the server.
- Update the server state and client key as follows:
 - $\text{count} := \text{count} + 1$.
 - If $l_{\ell-1}$ divides count , then reshuffle level $\ell - 1$ into level ℓ using the ReShuffle^ℓ procedure of Figure 3, namely execute $\text{ReShuffle}^\ell(\text{ck}_R^{\ell-1}, \text{ck}_R^\ell, \text{ck}_m^{\ell-1}, \text{st}_R^{\ell-1}, \text{st}_R^\ell, \text{st}_m^{\ell-1})$.
 - For every i from $\ell - 2$ down to 0 for which l_i divides count , reshuffle level i into level $i + 1$ using the ReShuffle procedure of Figure 5, namely execute $\text{ReShuffle}(i, \text{ck}_R^i, \text{ck}_R^{i+1}, \text{ck}_m^i, \text{ck}_m^{i+1}, \text{st}_R^i, \text{st}_R^{i+1}, \text{st}_m^i, \text{st}_m^{i+1})$.

The ReShuffle^ℓ procedure

Inputs:

$\text{ck}_R^j, j \in \{\ell - 1, \ell\}$: the client keys for the RO-ORAMs $\mathcal{O}^{\ell-1}, \mathcal{O}^\ell$ of levels $\ell - 1, \ell$.

$\text{ck}_m^{\ell-1}$: the client key for the metadata ORAM $\mathcal{MO}^{\ell-1}$ of level $\ell - 1$.


$\text{st}_R^j, j \in \{\ell - 1, \ell\}$: the server states for the RO-ORAMs $\mathcal{O}^{\ell-1}, \mathcal{O}^\ell$ of levels $\ell - 1, \ell$.

$\text{st}_m^{\ell-1}$: the server state for the metadata ORAM $\mathcal{MO}^{\ell-1}$ of level $\ell - 1$.

Operation:

- Updating contents of level ℓ . For every $1 \leq k \leq n$:
 - Read the k 'th block (k, v_k) of \mathcal{DB}^ℓ .
 - Run the Read_m protocol (with client key $\text{ck}_m^{\ell-1}$ and server state $\text{st}_m^{\ell-1}$) on $\mathcal{MO}^{\ell-1}$ to read the index t in which memory block k appears in $\mathcal{DB}^{\ell-1}$. (If memory block k does not appear in $\mathcal{DB}^{\ell-1}$ then Read_m returns \perp to the client.)
 - Run the Read_R protocol (with client key $\text{ck}_R^{\ell-1}$ and server state $\text{st}_R^{\ell-1}$) on $\mathcal{O}^{\ell-1}$ to read the value v'_k of the t 'th block in $\mathcal{DB}^{\ell-1}$. (If $t = \perp$, perform a dummy read of the block at index 1.)
 - If $t \neq \perp$, replace the k 'th block in \mathcal{DB}^ℓ with (k, v'_k) . Otherwise, replace the k 'th block with (k, v_k) (this is a dummy write).
- Updating RO-ORAMs. Replace $\mathcal{DB}^{\ell-1}$ with an array consisting of $l_{\ell-1}$ dummy blocks. For $j = \ell - 1, \ell$, run the OblSetup_R protocol to generate a new RO-ORAM \mathcal{O}^j for \mathcal{DB}^j : $(\tilde{\text{ck}}_R^j, \tilde{\text{st}}_R^j) \leftarrow \text{OblSetup}_R(1^\lambda, \mathcal{DB}^j)$. Replace $\text{ck}_R^j, \text{st}_R^j$ with $\tilde{\text{ck}}_R^j, \tilde{\text{st}}_R^j$, respectively.
- Updating metadata ORAM. For every $1 \leq k \leq l_{\ell-1}$:
 - Read the k 'th block (j, v_j) of $\mathcal{DB}^{\ell-1}$.
 - Remove the entry corresponding to k from $\mathcal{M}^{\ell-1}$ by executing the Write_m protocol on $\mathcal{MO}^{\ell-1}$ (with client key $\text{ck}_m^{\ell-1}$ and server state $\text{st}_m^{\ell-1}$).

Figure 3: The ReShuffle^ℓ protocol used in Construction 4.4

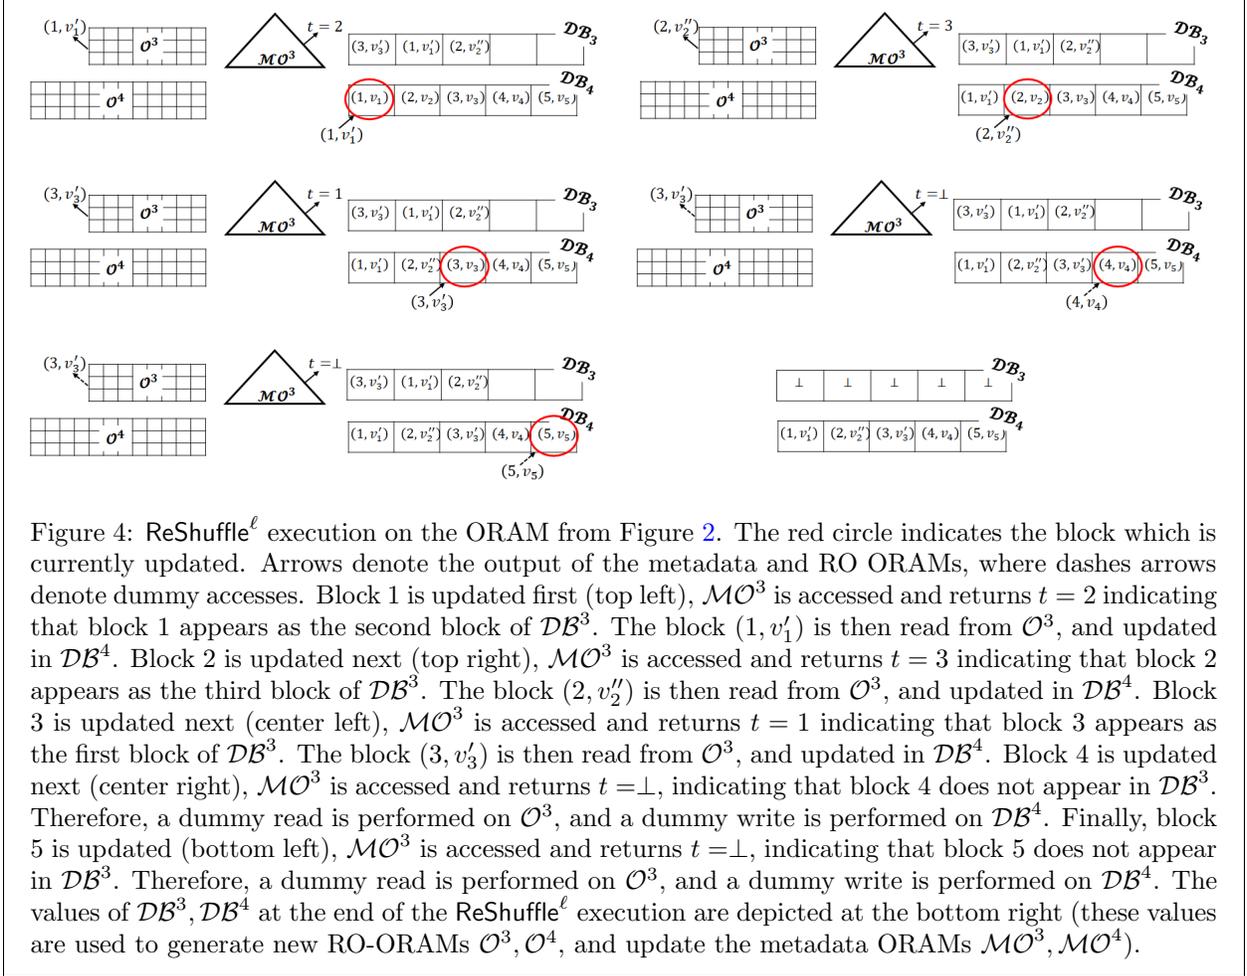

Remark on De-amortization. We note that using a technique of Ostrovsky and Shoup [OS97], the server complexity in Construction 4.4 can be de-amortized, by slightly modifying the Write protocol to allow the reshuffling process to be *spread-out* over multiple accesses to the ORAM. The reason reshuffle operations can be “spread out” is that reshuffling is performed in a “bottom-up” fashion, namely when it is time to reshuffle level i into level $i + 1$, that reshuffling is executed *before* level $i - 1$ is reshuffled into level i . Thus, the memory blocks that are involved in the reshuffle of level i into level $i + 1$ have been known for the last l_{i-1} time units, ever since level i was last updated due to a reshuffle of level $i - 1$ into it. Therefore, the operations needed to perform the reshuffle of level i into level $i + 1$ can be spread out over l_{i-1} operations.

We prove the following claims about Construction 4.4.

Claim 4.5 (ORAM security). *Assuming the computational (respectively, statistical) security of all of the building blocks, Construction 4.4 is a computationally-secure (respectively, statistically secure) ORAM scheme.*

Claim 4.6 (ORAM complexity). *Assume that:*

- The logical memory \mathcal{DB} has block size B , and the underlying ORAM scheme has block size mB , satisfying $B > mB \geq 2 \log n$, respectively.

The ReShuffle procedure

Inputs:

i : the index of a level to reshuffle.

$\text{ck}_R^j, j \in \{i, i+1\}$: the client keys for the RO-ORAMs $\mathcal{O}^i, \mathcal{O}^{i+1}$ of levels $i, i+1$.

$\text{ck}_m^j, j \in \{i, i+1\}$: the client keys for the metadata ORAMs $\mathcal{MO}^i, \mathcal{MO}^{i+1}$ of levels $i, i+1$.


$\text{st}_R^j, j \in \{i, i+1\}$: the server states for the RO-ORAMs $\mathcal{O}^i, \mathcal{O}^{i+1}$ of levels $i, i+1$.

$\text{st}_m^j, j \in \{i, i+1\}$: the server states for the metadata ORAMs $\mathcal{MO}^i, \mathcal{MO}^{i+1}$ of levels $i, i+1$.

Operation:

- Let $m = \text{count} \bmod l_{i+1}$. (Notice that level $i+1$ contains at most m elements.)
- Updating level- $(i+1)$ blocks. For every $1 \leq k \leq m$:
 1. Read the k 'th block (j, v_j) from \mathcal{DB}^{i+1} .
 2. Run the Read_m protocol (with client key ck_m^i and server state st_m^i) on \mathcal{MO}^i to read the index t in which memory block j appears in \mathcal{DB}^i . (If memory block j does not appear in \mathcal{DB}^i then Read_m returns \perp to the client.)
 3. Run the Read_R protocol (with client key ck_R^i and server state st_R^i) on \mathcal{O}^i to read the value v'_j of the t 'th block in \mathcal{DB}^i . (If $t = \perp$, perform a dummy read to the block at index 1.)
 4. If $t \neq \perp$, replace the k 'th block in \mathcal{DB}^{i+1} with (j, v'_j) . Otherwise, replace the k 'th block with (j, v_j) (this is a dummy write).
 5. If $t \neq \perp$, remove the entry corresponding to t from \mathcal{M}^i by executing the Write_m protocol on \mathcal{MO}^i . Otherwise, perform a dummy write to \mathcal{MO}^i , writing back the entry corresponding to t that was read in step 2.
- Copying level- i blocks that were not in \mathcal{DB}^{i+1} . Initialize a counter count' to $m+1$. For every $1 \leq k \leq l_i$:
 1. Read the k 'th block (j, v_j) of \mathcal{DB}^i .
 2. Run the Read_m protocol (with client key ck_m^i and server state st_m^i) on \mathcal{MO}^i to read the index t in which memory block j appears in \mathcal{DB}^i . (This step checks whether the k 'th block has been deleted from \mathcal{DB}^i in the previous step. If so, then Read_m returns \perp to the client.)
 3. If $t \neq \perp$, write (j, v_j) as the count' 'th block of \mathcal{DB}^{i+1} . Otherwise, write a dummy block as the count' 'th block of \mathcal{DB}^{i+1} .
 4. If $t \neq \perp$, run the Write_m protocol (with client key ck_m^{i+1} and server state st_m^{i+1}) to write (count', j) to \mathcal{MO}^{i+1} . Otherwise, perform a dummy write to \mathcal{MO}^{i+1} .
 5. If $t \neq \perp$, remove the entry corresponding to t from \mathcal{M}^i by executing the Write_m protocol on \mathcal{MO}^i . Otherwise, perform a dummy write to \mathcal{MO}^i .
 6. Update the counter: $\text{count}' := \text{count}' + 1$.
- Updating level ORAMs. Replace \mathcal{DB}^i with an array consisting of l_i dummy blocks. For $j = i, i+1$, run the OblSetup_R protocol to generate a new RO-ORAM \mathcal{O}^j for \mathcal{DB}^j : $(\tilde{\text{ck}}_R^j, \tilde{\text{st}}_R^j) \leftarrow \text{OblSetup}_R(1^\lambda, \mathcal{DB}^j)$. Replace $\text{ck}_R^j, \text{st}_R^j$ with $\tilde{\text{ck}}_R^j, \tilde{\text{st}}_R^j$, respectively.

Figure 5: The ReShuffle protocol used in Construction 4.4

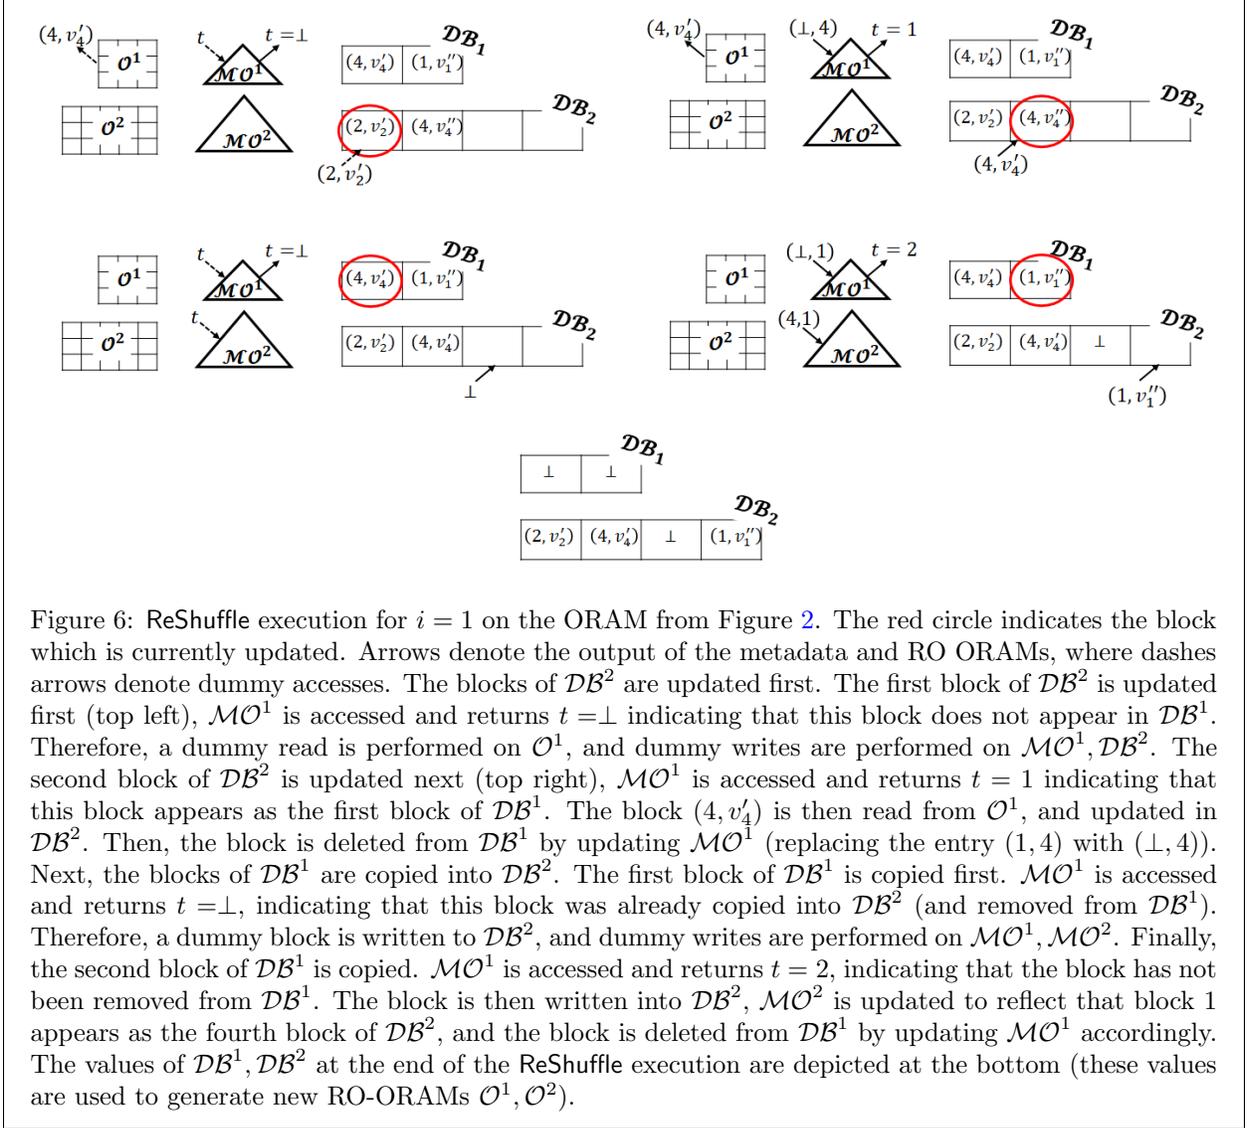

- The underlying RO-ORAM scheme has $\text{Ovh}_R(N)$ overhead, and for logical memories of size N ObSetup_R accesses $T(N)$ words.
- The underlying ORAM scheme has $\text{Ovh}_m(N)$ overhead.

Then each execution of the Read protocol of Construction 4.4 accesses

$$B \cdot \text{Ovh}_R(n) + \sum_{i=1}^{\ell-1} \left(mB \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{mB} \right) + B \cdot \text{Ovh}_R(l_i) \right)$$

words, and each execution of the Write protocol of Construction 4.4 accesses

$$\frac{B}{w} + \sum_{i=0}^{\ell-1} \frac{l_{i+1}}{l_i} \cdot \left(4B + 4mB \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{mB} \right) + B \cdot \text{Ovh}_R(l_i) \right)$$

$$+ \sum_{i=0}^{\ell-1} \left(\frac{\log l_{i+1}}{w} + mB \cdot \text{Ovh}_m \left(\frac{2l_{i+1} \log n}{mB} \right) + \frac{T(l_i) + T(l_{i+1})}{l_i} \right)$$

words, where w denotes the word size.

Remark: Simplified Overhead Bounds. We note that the overheads in Construction 4.4 can be simplified when it is instantiated with a metadata ORAM with poly-logarithmic overhead, and for a large enough (poly-logarithmic) block size $B = \text{poly } \log n$ for which $mB \cdot \text{Ovh}_m(n) = O(B)$. Concretely, the overheads described in Claim 4.6 can be simplified as follows: the Read protocol has $O(\ell) + \sum_{i=1}^{\ell} \text{Ovh}_R(l_i)$ overhead, and the overhead of the Write protocol is

$$\sum_{i=0}^{\ell-1} \left(\frac{l_{i+1}}{l_i} \cdot (\text{Ovh}_R(l_i) + O(1)) + \frac{T(l_i) + T(l_{i+1})}{l_i} + O(1) \right).$$

Claims Imply Theorems. To prove Theorems 4.1-4.3, we instantiate Construction 4.4 with the RO-ORAM of Construction 3.10, and the path ORAM scheme of Theorem 3.7 as the metadata ORAM.

Proof of Theorem 4.1. Computational security follows directly from Claim 4.5 since by Claim 3.5, Lemma 3.11 and Theorem 2.4, the assumptions imply the existence of a computationally-secure RO-ORAM scheme with oblivious setup.

As for the complexity of the construction, we choose $l_i = n^{i\mu}$ where $\mu = \frac{\epsilon - (\delta + \gamma + \delta\gamma)}{2(1+\delta)(1+\gamma)}$ is constant. Then the ORAM has a constant number $\ell = 1/\mu$ of levels. Recall that for every $i \in [\ell - 1]$, $|\mathcal{MO}^i| \leq 2n \log n$, and let $N := \frac{2n \log n}{\log^2 n \log \log n}$. Therefore, the ORAM scheme of Theorem 3.7 satisfies $mB = \log^2 N \log \log N$, and $\text{Ovh}_m(N) = O(\log N)$. Moreover, by Theorem 3.1, and the assumptions of Theorem 4.1, $\text{Ovh}_R(n) = O(\log \log n)$.

Regarding the overhead of the Read protocol, Claim 4.6 guarantees that every execution of the Read protocol accesses

$$B \cdot O(\log \log n) + \sum_{i=1}^{\ell-1} \log^2 N \log \log N \cdot O \left(\log \left(\frac{2n^{i\mu} \log n}{\log^2 N \log \log N} \right) \right) + \sum_{i=1}^{\ell-1} B \cdot O(\log \log n^{i\mu})$$

words. For $B = \Omega(\lambda \log^3 n \log^7 \log n)$ as in the theorem statement, with a sufficiently large constant in the $\Omega(\cdot)$ notation, and since ℓ, μ are constants, the second summand is at most $O(B)$. The fact that $\ell, \mu = O(1)$ also implies that the third summand is $O(B \cdot \log \log n)$. Therefore, the overall overhead of read operations is $O(\log \log n)$.

As for the overhead of the Write protocol, Claim 4.6 guarantees that every execution of the Write protocol accesses

$$\begin{aligned} & \frac{B}{w} + \sum_{i=0}^{\ell-1} \frac{l_{i+1}}{l_i} \cdot \left(4B + 4mB \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{mB} \right) + B \cdot \text{Ovh}_R(l_i) \right) \\ & + \sum_{i=0}^{\ell-1} \left(\frac{\log l_{i+1}}{w} + mB \cdot \text{Ovh}_m \left(\frac{2l_{i+1} \log n}{mB} \right) + \frac{T(l_i) + T(l_{i+1})}{l_i} \right) \end{aligned}$$

words. We analyze each summand separately. First, by Theorem 3.7, $\text{Ovh}_m \left(\frac{2l_i \log n}{mB} \right) = O(\log n)$ for every i , and so by the choice of B ,

$$mB \cdot \text{Ovh}_m \left(\frac{2l_{i+1} \log n}{mB} \right) \leq O(mB \cdot \log n) = O(B).$$

Using also the fact (noted above) that $\text{Ovh}_R(l_i) = O(\log \log n)$, we get

$$\frac{l_{i+1}}{l_i} \cdot \left(4\mathbf{B} + 4m\mathbf{B} \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{m\mathbf{B}} \right) + \mathbf{B} \cdot \text{Ovh}_R(l_i) \right) = O(n^\mu \cdot \mathbf{B} \cdot \log \log n).$$

Moreover, since ℓ is constant then

$$\sum_{i=0}^{\ell-1} \frac{\log l_{i+1}}{w} = O(\log n).$$

Finally, to bound the term $\frac{\mathbb{T}(l_i) + \mathbb{T}(l_{i+1})}{l_i}$, we first bound $\mathbb{T}(\cdot)$. According to Lemma 3.12, the execution of `ObISetup` accesses

$$\begin{aligned} & \lambda + \mathbb{T}_m \left(\frac{k(M + M \log M)}{m\mathbf{B}} \right) + 2n \cdot \frac{\mathbf{B}}{w} + \mathbb{T}_{\text{LDC}}(n) \cdot \frac{\mathbf{B}}{w} + kM \cdot \frac{\mathbf{B}}{w} \\ & + \left(\frac{kM}{m\mathbf{B}} + kM \right) \cdot m\mathbf{B} \cdot \text{Ovh} \left(\frac{k(M + M \log M)}{m\mathbf{B}} \right) + k \cdot \text{CC}_{\text{Sort}}(n, \mathbf{B}) \cdot \frac{\mathbf{B}}{w} \end{aligned}$$

words, where $\mathbb{T}_m(N)$ denotes the number of words accessed when setting up the metadata ORAM on logical memories of size N , $\text{Ovh}(N)$ denote the overhead of the metadata ORAM on logical memories of size N , $\mathbb{T}_{\text{LDC}}(n)$ denotes the number of words accessed to LDC-encode length- n messages, and $\text{CC}_{\text{Sort}}(n, \mathbf{B})$ denotes the number of (size- \mathbf{B}) blocks accessed during the execution of the oblivious-access sort algorithm.

For the specific building blocks assumed in Theorem 4.1, and by Theorem 3.7, $\mathbb{T}_m(N) = O(N \cdot m\mathbf{B})$, so $\mathbb{T}_m \left(\frac{k(M + M \log M)}{m\mathbf{B}} \right) = O(kM \log M) = O(n^{1+\delta} \log n)$, and $\text{Ovh}(N) = O(\log N)$ so $\text{Ovh} \left(\frac{k(M + M \log M)}{m\mathbf{B}} \right) = O(\log n)$. Moreover, $\mathbb{T}_{\text{LDC}}(n) = n^{(1+\delta)(1+\gamma)}$, and $\text{CC}_{\text{Sort}}(n, \mathbf{B}) = O(n \log \log n)$. Therefore, executing `ObISetup` on a logical memory of size n accesses $\mathbb{T}(n) = \lambda + n^{(1+\delta)(1+\gamma)} \cdot \frac{\mathbf{B}}{w} + O(n^{1+\delta} \log^4 n) = O(n^{(1+\delta)(1+\gamma)})$ words (for a large enough n).

Therefore, because $l_i = n^{i\mu}$, we get

$$\frac{\mathbb{T}(l_i) + \mathbb{T}(l_{i+1})}{l_i} \leq \frac{2\mathbb{T}(l_{i+1})}{l_i} = 2 \cdot \frac{O(n^{(i+1)\mu(1+\delta)(1+\gamma)})}{n^{i\mu}} = O\left(n^{i\mu(\delta+\gamma+\delta\gamma)+\mu(1+\delta)(1+\gamma)}\right)$$

so

$$\sum_{i=0}^{\ell-1} \frac{\mathbb{T}(l_i) + \mathbb{T}(l_{i+1})}{l_i} \leq \ell \cdot O\left(n^{\ell\mu(\delta+\gamma+\delta\gamma)+\mu(1+\delta)(1+\gamma)}\right) \leq O(n^\epsilon)$$

where the right-most inequality follows from the choice of μ .

In summary, since $\ell = O(1)$ then every execution of the `Write` protocol accesses

$$O(\mathbf{B} + n^\mu \log \log n \cdot \mathbf{B} + n^\epsilon) = O(\mathbf{B} \cdot n^\epsilon)$$

words, for a large enough n (since for large enough n , $n^\mu \log \log n \leq n^{2\mu} \leq n^\epsilon$). Consequently, the overhead of write operations is $O(n^\epsilon)$.

Finally, regarding client storage, emulating the LDC decoder requires storing $k = O(1)$ size- \mathbf{B} blocks. By the choice of \mathbf{B} , running `ObISetup` (as part of reshuffle operations) requires the client to store only $O(1)$ size- \mathbf{B} blocks. Operations on `mDB` require (by Theorem 3.7) storing $O(\log N \log \log N)$ size- $m\mathbf{B}$ blocks which corresponds to a constant number of size- \mathbf{B} blocks. \square

The proof of Theorem 4.2 is similar to the proof of Theorem 4.1, so we only sketch the differences.

Proof of Theorem 4.2. As in the proof of Theorem 4.1, we choose $l_i = n^{i\mu}$ where $\mu = \frac{\epsilon - (\delta + \gamma + \delta\gamma)}{2(1+\delta)(1+\gamma)}$ is constant, so $\ell = 1/\mu$.

Regarding the overhead of the Read protocol, $\text{Ovh}_R(n) = o(\log n)$ by Theorem 3.1 and the assumptions of Theorem 4.2. Therefore, Claim 4.6 guarantees that every execution of the Read protocol accesses

$$\mathbf{B} \cdot o(\log n) + \sum_{i=1}^{\ell-1} \log^2 N \log \log N \cdot O\left(\log\left(\frac{2n^{i\mu} \log n}{\log^2 N \log \log N}\right)\right) + \sum_{i=1}^{\ell-1} \mathbf{B} \cdot o(\log n^{i\mu})$$

words. For our choice of \mathbf{B} , μ , and ℓ , this is at most $o(\mathbf{B} \cdot \log n)$.

As for the overhead of the Write protocol, the analysis is identical to that of Theorem 4.1, except for the second summand (which depends on Ovh_R), and the last summand (which depends on the query complexity of the LDC decoder, and the complexity of the oblivious-access sort algorithm). Concretely, the second summand is:

$$\sum_{i=0}^{\ell-1} \frac{l_{i+1}}{l_i} \cdot \left(4\mathbf{B} + 4\mathbf{mB} \cdot \text{Ovh}_m\left(\frac{2l_i \log n}{\mathbf{mB}}\right) + \mathbf{B} \cdot \text{Ovh}_R(l_i)\right) = o(n^\mu \cdot \mathbf{B} \cdot \log n) + O(n^\mu \cdot \mathbf{B}).$$

To bound the last summand, we bound the complexity of the **ObSetup** protocol. Recall that by Lemma 3.12, **ObSetup** accesses

$$\begin{aligned} & \lambda + \mathsf{T}_m\left(\frac{k(M + M \log M)}{\mathbf{mB}}\right) + 2n \cdot \frac{\mathbf{B}}{w} + \mathsf{T}_{\text{LDC}}(n) \cdot \frac{\mathbf{B}}{w} + kM \cdot \frac{\mathbf{B}}{w} \\ & + \left(\frac{kM}{\mathbf{mB}} + kM\right) \cdot \mathbf{mB} \cdot \text{Ovh}\left(\frac{k(M + M \log M)}{\mathbf{mB}}\right) + k \cdot \text{CC}_{\text{Sort}}(n, \mathbf{B}) \cdot \frac{\mathbf{B}}{w} \end{aligned}$$

words. For the parameters assumed in the theorem statement, $\mathsf{T}_m\left(\frac{k(M + M \log M)}{\mathbf{mB}}\right) = O(kM \log M) = n^{1+\delta} \cdot \log n \cdot \text{poly} \log \log n$, and $\text{Ovh}\left(\frac{k(M + M \log M)}{\mathbf{mB}}\right) = O(\log n)$. Moreover, $\mathsf{T}_{\text{LDC}}(n) = n^{(1+\delta)(1+\gamma)}$, and $\text{CC}_{\text{Sort}}(n, \mathbf{B}) = O(n \log \log n) + o\left(\frac{n \cdot \log n}{\log^{2^c} \log n}\right)$ (where $k = \log^c \log n$). Therefore, **ObSetup** accesses $\lambda + \mathbf{B} (n^{(1+\delta)(1+\gamma)} + n^{1+\delta} \cdot \log n \cdot \text{poly} \log \log n) = O(\mathbf{B} \cdot n^{(1+\delta)(1+\gamma)})$ words (for a large enough n).

Therefore,

$$\sum_{i=0}^{\ell-1} \frac{\mathsf{T}(l_i) + \mathsf{T}(l_{i+1})}{l_i} \leq O(\mathbf{B} \cdot n^\epsilon)$$

similar to the proof of Theorem 4.1.

Consequently, every execution of the Write protocol accesses

$$o(n^\mu \cdot \mathbf{B} \cdot \log n) + O(n^\epsilon \cdot \mathbf{B}) = O(n^\epsilon \cdot \mathbf{B})$$

words for a large enough n .

Finally, regarding client storage, emulating the LDC decoder requires storing $k = \text{poly} \log \log n$ size- \mathbf{B} blocks, running **ObSetup** requires the client to store only $O(1)$ size- \mathbf{B} blocks, and operations on \mathbf{mDB} require storing a constant number of size- \mathbf{B} blocks. \square

Proof of Theorem 4.3. Security follows directly from Claim 4.5 since by Claim 3.5, Lemma 3.11 and Theorem 2.4, the assumptions in the theorem statement imply the existence of a secure RO-ORAM scheme with oblivious setup.

As for the complexity of the construction, we choose $l_i = 2^{i \cdot \log^2 \log n}$, so the ORAM has $\ell = \frac{\log n}{\log^2 \log n}$ levels. Let $N := \frac{2n \log n}{\log^2 n \log \log n}$, and recall that $mB = \log^2 N \log \log N$ and $\text{Ovh}_m(N) = O(\log N)$ (by Theorem 3.7), and $\text{Ovh}_R(n) = O(\log \log n)$ (by Theorem 3.1, and the assumptions in the theorem statement).

Regarding the overhead of the Read protocol, Claim 4.6 guarantees that every execution of the Read protocol accesses

$$\sum_{i=1}^{\ell-1} \log^2 N \log \log N \cdot O\left(\log\left(\frac{2l_i \log n}{\log^2 N \log \log N}\right)\right) + \sum_{i=1}^{\ell} B \cdot O(\log \log l_i) = \sum_{i=1}^{\ell} B \cdot O(\log \log l_i)$$

words, where the equality holds for $B = \Omega(\lambda \log^3 n \log^7 \log n)$ as in the theorem statement, with a sufficiently large constant in the $\Omega(\cdot)$ notation. We can upper-bound this by

$$B \cdot \ell \cdot O(\log \log n) = B \cdot \frac{\log n}{\log^2 \log n} \cdot O(\log \log n) = o(B \cdot \log n).$$

As for the overhead of the Write protocol, Claim 4.6 guarantees that every execution of the Write protocol accesses

$$\begin{aligned} & \frac{B}{w} + \sum_{i=0}^{\ell-1} \frac{l_{i+1}}{l_i} \cdot \left(4B + 4mB \cdot \text{Ovh}_m\left(\frac{2l_i \log n}{mB}\right) + B \cdot \text{Ovh}_R(l_i)\right) \\ & + \sum_{i=0}^{\ell-1} \left(\frac{\log l_{i+1}}{w} + mB \cdot \text{Ovh}_m\left(\frac{2l_{i+1} \log n}{mB}\right) + \frac{T(l_i) + T(l_{i+1})}{l_i}\right) \end{aligned}$$

words. We analyze each summand separately, using the fact that $mB \cdot \text{Ovh}_m\left(\frac{2l_i \log n}{mB}\right) \leq O(B)$ for every i (by Theorem 3.7 and the choice of B), and $\text{Ovh}_R(l_i) = O(\log \log n)$ (by Theorem 3.1 and the assumptions in the theorem statement). First,

$$\frac{l_{i+1}}{l_i} \cdot \left(4B + 4mB \cdot \text{Ovh}_m\left(\frac{2l_i \log n}{mB}\right) + B \cdot \text{Ovh}_R(l_i)\right) = O\left(B \cdot 2^{\log^2 \log n} \cdot \log \log n\right)$$

so

$$\sum_{i=0}^{\ell-1} \frac{l_{i+1}}{l_i} \cdot \left(4B + 4mB \cdot \text{Ovh}_m\left(\frac{2l_i \log n}{mB}\right) + B \cdot \text{Ovh}_R(l_i)\right) = O\left(B \cdot 2^{\log^2 \log n} \cdot \frac{\log n}{\log \log n}\right)$$

Moreover,

$$\sum_{i=0}^{\ell-1} mB \cdot \text{Ovh}_m\left(\frac{2l_{i+1} \log n}{mB}\right) = O\left(B \cdot \frac{\log n}{\log^2 \log n}\right)$$

and

$$\sum_{i=0}^{\ell-1} \frac{\log l_{i+1}}{w} \leq \ell \cdot \log n = \frac{\log^2 n}{\log^2 \log n}.$$

Finally, to bound the term $\frac{\mathsf{T}(l_i) + \mathsf{T}(l_{i+1})}{l_i}$, we first bound $\mathsf{T}(\cdot)$. According to Lemma 3.12, the execution of `ObSetup` accesses

$$\begin{aligned} & \lambda + \mathsf{T}_m \left(\frac{k(M + M \log M)}{m\mathsf{B}} \right) + 2n \cdot \frac{\mathsf{B}}{w} + \mathsf{T}_{\text{LDC}}(n) \cdot \frac{\mathsf{B}}{w} + kM \cdot \frac{\mathsf{B}}{w} \\ & + \left(\frac{kM}{m\mathsf{B}} + kM \right) \cdot m\mathsf{B} \cdot \text{Ovh} \left(\frac{k(M + M \log M)}{m\mathsf{B}} \right) + k \cdot \text{CC}_{\text{Sort}}(n, \mathsf{B}) \cdot \frac{\mathsf{B}}{w} \end{aligned}$$

words, where $\mathsf{T}_m(N)$ denotes the number of words accessed when setting up the metadata ORAM on a logical memory of size N , $\text{Ovh}(N)$ denote the overhead of the metadata ORAM on a size- N logical memory, $\mathsf{T}_{\text{LDC}}(n)$ denotes the number of words accessed to LDC-encode length- n messages, and $\text{CC}_{\text{Sort}}(n, \mathsf{B})$ denotes the number of words accessed during the execution of the oblivious-access sort algorithm.

For the specific building blocks assumed in Theorem 4.3, and by Theorem 3.7, $\mathsf{T}_m(N) = O(N \cdot m\mathsf{B})$, so $\mathsf{T}_m \left(\frac{k(M + M \log M)}{m\mathsf{B}} \right) = O(kM \log M) = n^{1+o(1)}$ (for a large enough n), and $\text{Ovh}(N) = O(\log N)$ so $\text{Ovh} \left(\frac{k(M + M \log M)}{m\mathsf{B}} \right) = O(\log n)$. Moreover, $\mathsf{T}_{\text{LDC}}(n) = n^{1+o(1)}$, and $\text{CC}_{\text{Sort}}(n, \mathsf{B}) = O(n \log \log n)$. Therefore, executing `ObSetup` requires accessing $\lambda + n^{1+o(1)} \cdot \mathsf{B} = n^{1+o(1)} \cdot \mathsf{B}$ words (for a large enough n).

Therefore,

$$\sum_{i=0}^{\ell-1} \frac{\mathsf{T}(l_i) + \mathsf{T}(l_{i+1})}{l_i} \leq \sum_{i=0}^{\ell-1} \frac{2\mathsf{T}(l_{i+1})}{l_i} \leq \ell \cdot 2 \cdot \frac{n^{1+o(1)} \cdot \mathsf{B}}{n/2^{\log^2 \log n}} = \frac{\log n}{\log^2 \log n} \cdot 2 \cdot n^{o(1)} \cdot \mathsf{B} \cdot 2^{\log^2 \log n} = n^{o(1)} \cdot \mathsf{B}.$$

In summary, every execution of the `Write` protocol accesses

$$O \left(\mathsf{B} \cdot 2^{\log^2 \log n} \cdot \frac{\log n}{\log \log n} \right) + n^{o(1)} \cdot \mathsf{B} = \mathsf{B} \cdot n^{o(1)}$$

words, for a large enough n .

Finally, regarding client storage, emulating the LDC decoder requires storing $k = O(1)$ size- B blocks. By the choice of B , running `ObSetup` (as part of reshuffle operations) requires the client to store only $O(1)$ size- B blocks. Operations on $m\mathsf{DB}$ require (by Theorem 3.7) storing $O(\log N \log \log N)$ size- $m\mathsf{B}$ blocks which corresponds to a constant number of size- B blocks. \square

A Note On Statistically-Secure ORAM with Writes. Our ORAM with writes constructions (Theorems 4.1-4.3) are computationally-secure due to the use of a computationally-secure RO-ORAM with oblivious setup. However, as stated in Claim 4.5, given a *statistically-secure* RO-ORAM with oblivious setup the resultant ORAM with writes would also be statistically secure. As noted in Section 3.1, such a scheme can be obtained assuming an LDC with a small encoding circuit, or with an oblivious encoding procedure. Thus, given an LDC with one of these additional properties we can get a statistically-secure ORAM with writes (with the parameters stated in Theorems 4.1-4.3).

Security Analysis: Proof of Claim 4.5. We show that Construction 4.4 is secure.

Proof of Claim 4.5. The correctness of the scheme follows from the correctness of the underlying RO-ORAM (with oblivious setup) and metadata ORAM schemes, and the description of Construction 4.4. Indeed, the reshuffling procedures preserve the invariant that for every level i , \mathcal{DB}^i

contains at most a single copy of each memory block, where upper levels contain more recent copies, so every read operation returns the correct value.

We now argue security. Let DB^0, DB^1 be two logical memories consisting of n size- B blocks, and let Q^0, Q^1 be two sequences of $q = \text{poly}(\lambda)$ read and write operations. We proceed via a sequence of hybrids.

\mathcal{H}_0^b : Hybrid \mathcal{H}_0^b is the access pattern $\text{AP}(\text{DB}^b, Q^b)$ in an execution of the sequence Q^b on the ORAM generated for the logical memory DB^b .

\mathcal{H}_1^b : In hybrid \mathcal{H}_1^b , for every level $1 \leq i < \ell$, we replace all entries of \mathcal{M}^i with dummy values of (e.g.,) the all-0 string. Moreover, we replace all read and write accesses to the metadata ORAM \mathcal{MO}^i with dummy operations that (e.g.,) read and write the all-0 string to the first location in \mathcal{M}^i . (We note that the accesses to the arrays \mathcal{DB}^i , and the RO-ORAMs \mathcal{O}^i , remain unchanged.)

Hybrids \mathcal{H}_0^b and \mathcal{H}_1^b are statistically indistinguishable by the security of the underlying ORAM scheme, using a standard hybrid argument in which we replace \mathcal{M}^i and the accesses to \mathcal{MO}^i one level at a time.

\mathcal{H}_2^b : In hybrid \mathcal{H}_2^b , for every level $1 \leq i \leq \ell$, we initialize its RO-ORAM \mathcal{O}^i (during **Setup** and **ReShuffle**, **ReShuffle** ^{ℓ} calls) with a dummy array whose blocks all contain (e.g.,) the all-0 string. Moreover, we replace all read and write accesses to \mathcal{O}^i with dummy operations that (e.g.,) read the first block in \mathcal{O}^i and write the all-0 string to the first block in \mathcal{O}^i . (As in \mathcal{H}_1^b , the accesses to the arrays \mathcal{DB}^i remain unchanged, and the answers to read operations are according to the actual value of the blocks, as they appear in DB^i .)

Hybrids \mathcal{H}_1^b and \mathcal{H}_2^b are computationally indistinguishable by the security of the underlying RO-ORAM scheme with oblivious setup, using a standard hybrid argument in which we replace the contents and accesses to \mathcal{O}^i of one level at a time.

Notice that $\mathcal{H}_2^0, \mathcal{H}_2^1$ may differ only in the parts of the access pattern caused by the accesses to $\mathcal{DB}^i, i \in [\ell]$. Since those accesses are independent of the access patterns Q^0, Q^1 (respectively), or the contents of the logical memories DB^0, DB^1 (respectively), we conclude that $\mathcal{H}_2^0 \equiv \mathcal{H}_2^1$. \square

Complexity Analysis: Proof of Claim 4.6. We now analyze the complexity of Construction 4.4, proving Claim 4.6. Notice that since $\text{mB} \geq 2 \log n$, each entry in $\mathcal{M}^i, i \in [\ell - 1]$ is contained in a single block of $\mathcal{MO}^i, i \in [\ell - 1]$. Notice also that for every level $i \in [\ell - 1]$, the map \mathcal{M}^i contains at most $l_i \cdot 2 \log n$ bits, and let $N_m := \frac{2n \log n}{\text{mB}}$ denote an upper bound on $|\mathcal{M}^i|$ in terms of size- mB blocks.

Proof of Claim 4.6. We first analyze the complexity of read operations. Every execution of the Read protocol consists of the following operations:

- For every level $1 \leq i \leq \ell - 1$, a single access to the metadata ORAM \mathcal{MO}^i , which accesses $\text{mB} \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{\text{mB}} \right)$ words.
- For every level $1 \leq i \leq \ell$, a single access to the RO-ORAM \mathcal{O}^i , which accesses $\text{B} \cdot \text{Ovh}_R(l_i)$ words.

In total, these operations access

$$B \cdot \text{Ovh}_R(n) + \sum_{i=1}^{\ell-1} \left(mB \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{mB} \right) + B \cdot \text{Ovh}_R(l_i) \right)$$

words.

Next, we analyze the complexity of write operations. Every execution of the Write protocol consists of writing a single block of size B to the server (writing the “dummy” level 0). In addition, each Write execution performs its “share” of the operations needed to execute the reshuffle procedures ReShuffle^ℓ , and ReShuffle for every level $1 \leq i \leq \ell - 2$. More specifically, for every level $0 \leq i < \ell$, an execution of the Write protocol entails performing a $\frac{1}{l_i}$ -fraction of the *total* number of operations needed to reshuffle level i into level $i + 1$. We now analyze these operations.

The ReShuffle procedure, when applied to level i , consists of the following operations:

- Every block in levels $i, i + 1$ (the total number of such blocks is at most l_{i+1}) causes:
 - Two accesses (one for reading, one for writing) to \mathcal{DB}^{i+1} ,¹² resulting in accessing $2\frac{B}{w}$ words.
 - Two accesses (one for reading, one for writing) to \mathcal{MO}^i , resulting in accessing $2mB \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{mB} \right)$ words.
- Every level- $(i + 1)$ block (there are at most l_{i+1} such blocks) causes a single access to \mathcal{O}^i , which accesses $B \cdot \text{Ovh}_R(l_i)$ words.
- Every level- i block (there are at most l_i such blocks) causes a single update of the counter, and a single access to \mathcal{MO}^{i+1} , accessing $\frac{\log l_{i+1}}{w} + mB \cdot \text{Ovh}_m \left(\frac{2l_{i+1} \log n}{mB} \right)$ words.
- The RO-ORAMs $\mathcal{O}^j, j \in \{i, i + 1\}$ are regenerated by running ObISetup_R on the new arrays $\mathcal{DB}^j, j \in \{i, i + 1\}$, accessing $T(l_i) + T(l_{i+1})$ words.

The ReShuffle^ℓ procedure accesses at most this number of words.

In summary, the update operations needed to reshuffle level $i, 0 \leq i < \ell - 1$ into level $i + 1$ add a total of at most

$$\frac{l_{i+1}}{l_i} \cdot \left(4B + 4mB \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{mB} \right) + B \cdot \text{Ovh}_R(l_i) \right) + \frac{\log l_{i+1}}{w} + mB \cdot \text{Ovh}_m \left(\frac{2l_{i+1} \log n}{mB} \right) + \frac{T(l_i) + T(l_{i+1})}{l_i}$$

accessed words to each execution of the Write protocol. Therefore, each execution of the Write protocol accesses at most

$$\begin{aligned} & \frac{B}{w} + \sum_{i=0}^{\ell-1} \frac{l_{i+1}}{l_i} \cdot \left(4B + 4mB \cdot \text{Ovh}_m \left(\frac{2l_i \log n}{mB} \right) + B \cdot \text{Ovh}_R(l_i) \right) \\ & + \sum_{i=0}^{\ell-1} \left(\frac{\log l_{i+1}}{w} + mB \cdot \text{Ovh}_m \left(\frac{2l_{i+1} \log n}{mB} \right) + \frac{T(l_i) + T(l_{i+1})}{l_i} \right) \end{aligned}$$

words on the server. □

¹²More accurately, blocks from level i cause one access to \mathcal{DB}^i and one access to \mathcal{DB}^{i+1} , but these operations have the same complexity since they entail reading or writing a size- B block.

Acknowledgements

We thank the anonymous Journal of Cryptology reviewers for their comments, which helped us improve the paper. This research was supported by NSF grants CNS-1314722, CNS-1413964, CNS-1750795 and the Alfred P. Sloan Research Fellowship. The first author was supported in part by The Eric and Wendy Schmidt Postdoctoral Grant for Women in Mathematical and Computing Sciences.

References

- [AFN⁺17] Ittai Abraham, Christopher W. Fletcher, Kartik Nayak, Benny Pinkas, and Ling Ren. Asymptotically tight bounds for composing ORAM with PIR. In *Public-Key Cryptography - PKC 2017 - 20th IACR International Conference on Practice and Theory in Public-Key Cryptography, Amsterdam, The Netherlands, March 28-31, 2017, Proceedings, Part I*, pages 91–120, 2017.
- [AKL⁺20] Gilad Asharov, Ilan Komargodski, Wei-Kai Lin, Kartik Nayak, Enoch Peserico, and Elaine Shi. OptORAMA: Optimal oblivious RAM. In *Advances in Cryptology - EUROCRYPT 2020 - 39th Annual International Conference on the Theory and Applications of Cryptographic Techniques, Zagreb, Croatia, May 10-14, 2020, Proceedings, Part II*, pages 403–432, 2020.
- [AKS83] Miklós Ajtai, János Komlós, and Endre Szemerédi. An $O(n \log n)$ sorting network. In *Proceedings of the 15th Annual ACM Symposium on Theory of Computing, 25-27 April, 1983*, pages 1–9, 1983.
- [AKST14] Daniel Apon, Jonathan Katz, Elaine Shi, and Aishwarya Thiruvengadam. Verifiable oblivious storage. In *Public-Key Cryptography - PKC 2014 - 17th International Conference on Practice and Theory in Public-Key Cryptography, Buenos Aires, Argentina, March 26-28, 2014. Proceedings*, pages 131–148, 2014.
- [BCP15] Elette Boyle, Kai-Min Chung, and Rafael Pass. Large-scale secure computation: Multi-party computation for (parallel) RAM programs. In *Advances in Cryptology - CRYPTO 2015 - 35th Annual Cryptology Conference, Santa Barbara, CA, USA, August 16-20, 2015, Proceedings, Part II*, pages 742–762, 2015.
- [BIM00] Amos Beimel, Yuval Ishai, and Tal Malkin. Reducing the servers computation in private information retrieval: PIR with preprocessing. In *Advances in Cryptology - CRYPTO 2000, 20th Annual International Cryptology Conference, Santa Barbara, California, USA, August 20-24, 2000, Proceedings*, pages 55–73, 2000.
- [BIPW17] Elette Boyle, Yuval Ishai, Rafael Pass, and Mary Wootters. Can we access a database both locally and privately? In *Theory of Cryptography - 15th International Conference, TCC 2017, Baltimore, MD, USA, November 12-15, 2017, Proceedings, Part II*, pages 662–693, 2017.
- [Blu84] Norbert Blum. A boolean function requiring $3n$ network size. *Theor. Comput. Sci.*, 28:337–345, 1984.

- [BN16] Elette Boyle and Moni Naor. Is there an oblivious RAM lower bound? In *Proceedings of the 2016 ACM Conference on Innovations in Theoretical Computer Science, Cambridge, MA, USA, January 14-16, 2016*, pages 357–368, 2016.
- [CDH20] David Cash, Andrew Drucker, and Alexander Hoover. A lower bound for one-round oblivious RAM. In *Theory of Cryptography - 18th International Conference, TCC 2020, Durham, NC, USA, November 16-19, 2020, Proceedings, Part I*, pages 457–485, 2020.
- [CFL⁺13] Yeow Meng Chee, Tao Feng, San Ling, Huaxiong Wang, and Liang Feng Zhang. Query-efficient locally decodable codes of subexponential length. *Computational Complexity*, 22(1):159–189, 2013.
- [CHR17] Ran Canetti, Justin Holmgren, and Silas Richelson. Towards doubly efficient private information retrieval. In *Theory of Cryptography - 15th International Conference, TCC 2017, Baltimore, MD, USA, November 12-15, 2017, Proceedings, Part II*, pages 694–726, 2017.
- [CKW13] David Cash, Alptekin K upc u, and Daniel Wichs. Dynamic proofs of retrievability via oblivious RAM. In *Advances in Cryptology - EUROCRYPT 2013, 32nd Annual International Conference on the Theory and Applications of Cryptographic Techniques, Athens, Greece, May 26-30, 2013. Proceedings*, pages 279–295, 2013.
- [Dur64] Richard Durstenfeld. Algorithm 235: Random permutation. *Commun. ACM*, 7(7):420, 1964.
- [DvDF⁺16] Srinivas Devadas, Marten van Dijk, Christopher W. Fletcher, Ling Ren, Elaine Shi, and Daniel Wichs. Onion ORAM: A constant bandwidth blowup oblivious RAM. In *Theory of Cryptography - 13th International Conference, TCC 2016-A, Tel Aviv, Israel, January 10-13, 2016, Proceedings, Part II*, pages 145–174, 2016.
- [Efr09] Klim Efremenko. 3-query locally decodable codes of subexponential length. In *Proceedings of the 41st Annual ACM Symposium on Theory of Computing, STOC 2009, Bethesda, MD, USA, May 31 - June 2, 2009*, pages 39–44, 2009.
- [FGHK16] Magnus Gausdal Find, Alexander Golovnev, Edward A. Hirsch, and Alexander S. Kulikov. A better-than- $3n$ lower bound for the circuit complexity of an explicit function. In *IEEE 57th Annual Symposium on Foundations of Computer Science, FOCS 2016, 9-11 October 2016, Hyatt Regency, New Brunswick, New Jersey, USA*, pages 89–98, 2016.
- [FNR⁺15] Christopher W. Fletcher, Muhammad Naveed, Ling Ren, Elaine Shi, and Emil Stefanov. Bucket ORAM: single online roundtrip, constant bandwidth oblivious RAM. *IACR Cryptology ePrint Archive*, 2015:1065, 2015.
- [GGH⁺13] Craig Gentry, Kenny A. Goldman, Shai Halevi, Charanjit S. Jutla, Mariana Raykova, and Daniel Wichs. Optimizing ORAM and using it efficiently for secure computation. In *Privacy Enhancing Technologies - 13th International Symposium, PETS 2013, Bloomington, IN, USA, July 10-12, 2013. Proceedings*, pages 1–18, 2013.

- [GHJR15] Craig Gentry, Shai Halevi, Charanjit S. Jutla, and Mariana Raykova. Private database access with HE-over-ORAM architecture. In *Applied Cryptography and Network Security - 13th International Conference, ACNS 2015, New York, NY, USA, June 2-5, 2015, Revised Selected Papers*, pages 172–191, 2015.
- [GKK⁺12] S. Dov Gordon, Jonathan Katz, Vladimir Kolesnikov, Fernando Krell, Tal Malkin, Mariana Raykova, and Yevgeniy Vahlis. Secure two-party computation in sublinear (amortized) time. In *the ACM Conference on Computer and Communications Security, CCS'12, Raleigh, NC, USA, October 16-18, 2012*, pages 513–524, 2012.
- [GKW18] S. Dov Gordon, Jonathan Katz, and Xiao Wang. Simple and efficient two-server ORAM. In *Advances in Cryptology - ASIACRYPT 2018 - 24th International Conference on the Theory and Application of Cryptology and Information Security, Brisbane, QLD, Australia, December 2-6, 2018, Proceedings, Part III*, pages 141–157, 2018.
- [GMOT12] Michael T. Goodrich, Michael Mitzenmacher, Olga Ohrimenko, and Roberto Tamassia. Privacy-preserving group data access via stateless oblivious RAM simulation. In *Proceedings of the Twenty-Third Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2012, Kyoto, Japan, January 17-19, 2012*, pages 157–167, 2012.
- [GO96] Oded Goldreich and Rafail Ostrovsky. Software protection and simulation on oblivious RAMs. *J. ACM*, 43(3):431–473, 1996.
- [Gol87] Oded Goldreich. Towards a theory of software protection and simulation by oblivious RAMs. In *Proceedings of the 19th Annual ACM Symposium on Theory of Computing, 1987, New York, New York, USA*, pages 182–194, 1987.
- [Goo14] Michael T. Goodrich. Zig-zag sort: a simple deterministic data-oblivious sorting algorithm running in $O(n \log n)$ time. In *Symposium on Theory of Computing, STOC 2014, New York, NY, USA, May 31 - June 03, 2014*, pages 684–693, 2014.
- [HO08] Brett Hemenway and Rafail Ostrovsky. Public-key locally-decodable codes. In *Advances in Cryptology - CRYPTO 2008, 28th Annual International Cryptology Conference, Santa Barbara, CA, USA, August 17-21, 2008. Proceedings*, pages 126–143, 2008.
- [HOSW11] Brett Hemenway, Rafail Ostrovsky, Martin J. Strauss, and Mary Wootters. Public key locally decodable codes with short keys. In *Approximation, Randomization, and Combinatorial Optimization. Algorithms and Techniques - 14th International Workshop, APPROX 2011, and 15th International Workshop, RANDOM 2011, Princeton, NJ, USA, August 17-19, 2011. Proceedings*, pages 605–615, 2011.
- [HOWW19] Ariel Hamlin, Rafail Ostrovsky, Mor Weiss, and Daniel Wichs. Private anonymous data access. In *Advances in Cryptology - EUROCRYPT 2019 - 38th Annual International Conference on the Theory and Applications of Cryptographic Techniques, Darmstadt, Germany, May 19-23, 2019, Proceedings, Part II*, pages 244–273, 2019.
- [IM02] Kazuo Iwama and Hiroki Morizumi. An explicit lower bound of $5n - o(n)$ for boolean circuits. In *Mathematical Foundations of Computer Science 2002, 27th International Symposium, MFCS 2002, Warsaw, Poland, August 26-30, 2002, Proceedings*, pages 353–364, 2002.

- [IS10] Toshiya Itoh and Yasuhiro Suzuki. Improved constructions for query-efficient locally decodable codes of subexponential length. *IEICE Transactions*, 93-D(2):263–270, 2010.
- [KLO12] Eyal Kushilevitz, Steve Lu, and Rafail Ostrovsky. On the (in)security of hash-based oblivious RAM and a new balancing scheme. In *Proceedings of the Twenty-Third Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2012, Kyoto, Japan, January 17-19, 2012*, pages 143–156, 2012.
- [KM19] Eyal Kushilevitz and Tamer Mour. Sub-logarithmic distributed oblivious RAM with small block size. In *Public-Key Cryptography - PKC 2019 - 22nd IACR International Conference on Practice and Theory of Public-Key Cryptography, Beijing, China, April 14-17, 2019, Proceedings, Part I*, pages 3–33, 2019.
- [KO97] Eyal Kushilevitz and Rafail Ostrovsky. Replication is NOT needed: SINGLE database, computationally-private information retrieval. In *38th Annual Symposium on Foundations of Computer Science, FOCS '97, Miami Beach, Florida, USA, October 19-22, 1997*, pages 364–373, 1997.
- [KS14] Marcel Keller and Peter Scholl. Efficient, oblivious data structures for MPC. In *Advances in Cryptology - ASIACRYPT 2014 - 20th International Conference on the Theory and Application of Cryptology and Information Security, Kaoshiung, Taiwan, R.O.C., December 7-11, 2014, Proceedings, Part II*, pages 506–525, 2014.
- [KT00] Jonathan Katz and Luca Trevisan. On the efficiency of local decoding procedures for error-correcting codes. In *Proceedings of the Thirty-Second Annual ACM Symposium on Theory of Computing, May 21-23, 2000, Portland, OR, USA*, pages 80–86, 2000.
- [LHS⁺14] Chang Liu, Yan Huang, Elaine Shi, Jonathan Katz, and Michael W. Hicks. Automating efficient RAM-model secure computation. In *2014 IEEE Symposium on Security and Privacy, SP 2014, Berkeley, CA, USA, May 18-21, 2014*, pages 623–638, 2014.
- [LN18] Kasper Green Larsen and Jesper Buus Nielsen. Yes, there is an oblivious RAM lower bound! In *Advances in Cryptology - CRYPTO 2018 - 38th Annual International Cryptology Conference, Santa Barbara, CA, USA, August 19-23, 2018, Proceedings, Part II*, pages 523–542, 2018.
- [LO13] Steve Lu and Rafail Ostrovsky. Distributed oblivious RAM for secure two-party computation. In *Theory of Cryptography - 10th Theory of Cryptography Conference, TCC 2013, Tokyo, Japan, March 3-6, 2013. Proceedings*, pages 377–396, 2013.
- [LPM⁺13] Jacob R. Lorch, Bryan Parno, James W. Mickens, Mariana Raykova, and Joshua Schiffman. Shroud: ensuring private access to large-scale data in the data center. In *Proceedings of the 11th USENIX conference on File and Storage Technologies, FAST 2013, San Jose, CA, USA, February 12-15, 2013*, pages 199–214, 2013.
- [MBC14] Travis Mayberry, Erik-Oliver Blass, and Agnes Hui Chan. Efficient private file retrieval by combining ORAM and PIR. In *21st Annual Network and Distributed System Security Symposium, NDSS 2014, San Diego, California, USA, February 23-26, 2014*, 2014.

- [MLS⁺13] Martin Maas, Eric Love, Emil Stefanov, Mohit Tiwari, Elaine Shi, Krste Asanovic, John Kubiawicz, and Dawn Song. PHANTOM: practical oblivious computation in a secure processor. In *2013 ACM SIGSAC Conference on Computer and Communications Security, CCS'13, Berlin, Germany, November 4-8, 2013*, pages 311–324, 2013.
- [OS97] Rafail Ostrovsky and Victor Shoup. Private information storage (extended abstract). In *Proceedings of the Twenty-Ninth Annual ACM Symposium on the Theory of Computing, El Paso, Texas, USA, May 4-6, 1997*, pages 294–303, 1997.
- [Ost90] Rafail Ostrovsky. Efficient computation on oblivious RAMs. In *Proceedings of the 22nd Annual ACM Symposium on Theory of Computing, May 13-17, 1990, Baltimore, Maryland, USA*, pages 514–523, 1990.
- [PD06] Mihai Patrascu and Erik D. Demaine. Logarithmic lower bounds in the cell-probe model. *SIAM J. Comput.*, 35(4):932–963, 2006.
- [PPRY18] Sarvar Patel, Giuseppe Persiano, Mariana Raykova, and Kevin Yeo. PanORAMa: Oblivious RAM with logarithmic overhead. In *59th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2018, Paris, France, October 7-9, 2018*, pages 871–882, 2018.
- [Rag07] Prasad Raghavendra. A note on Yekhanin’s locally decodable codes. *Electronic Colloquium on Computational Complexity (ECCC)*, 14(016), 2007.
- [RFK⁺15] Ling Ren, Christopher W. Fletcher, Albert Kwon, Emil Stefanov, Elaine Shi, Marten van Dijk, and Srinivas Devadas. Constants count: Practical improvements to oblivious RAM. In *24th USENIX Security Symposium, USENIX Security 15, Washington, D.C., USA, August 12-14, 2015.*, pages 415–430, 2015.
- [SCSL11] Elaine Shi, T.-H. Hubert Chan, Emil Stefanov, and Mingfei Li. Oblivious RAM with $O((\log N)^3)$ worst-case cost. In *Advances in Cryptology - ASIACRYPT 2011 - 17th International Conference on the Theory and Application of Cryptology and Information Security, Seoul, South Korea, December 4-8, 2011. Proceedings*, pages 197–214, 2011.
- [SS13] Emil Stefanov and Elaine Shi. ObliviStore: High performance oblivious distributed cloud data store. In *20th Annual Network and Distributed System Security Symposium, NDSS 2013, San Diego, California, USA, February 24-27, 2013*, 2013.
- [SSS12] Emil Stefanov, Elaine Shi, and Dawn Xiaodong Song. Towards practical oblivious RAM. In *19th Annual Network and Distributed System Security Symposium, NDSS 2012, San Diego, California, USA, February 5-8, 2012*, 2012.
- [SvDS⁺13] Emil Stefanov, Marten van Dijk, Elaine Shi, Christopher W. Fletcher, Ling Ren, Xiangyao Yu, and Srinivas Devadas. Path ORAM: an extremely simple oblivious RAM protocol. In *2013 ACM SIGSAC Conference on Computer and Communications Security, CCS'13, Berlin, Germany, November 4-8, 2013*, pages 299–310, 2013.
- [WCS15] Xiao Wang, T.-H. Hubert Chan, and Elaine Shi. Circuit ORAM: on tightness of the Goldreich-Ostrovsky lower bound. In *Proceedings of the 22nd ACM SIGSAC Conference on Computer and Communications Security, Denver, CO, USA, October 12-6, 2015*, pages 850–861, 2015.

- [WHC⁺14] Xiao Shaun Wang, Yan Huang, T.-H. Hubert Chan, Abhi Shelat, and Elaine Shi. SCORAM: oblivious RAM for secure computation. In *Proceedings of the 2014 ACM SIGSAC Conference on Computer and Communications Security, Scottsdale, AZ, USA, November 3-7, 2014*, pages 191–202, 2014.
- [Woo07] David P. Woodruff. New lower bounds for general locally decodable codes. *Electronic Colloquium on Computational Complexity (ECCC)*, 14(006), 2007.
- [WS12] Peter Williams and Radu Sion. Single round access privacy on outsourced storage. In *the ACM Conference on Computer and Communications Security, CCS'12, Raleigh, NC, USA, October 16-18, 2012*, pages 293–304, 2012.
- [WW18] Mor Weiss and Daniel Wichs. Is there an oblivious RAM lower bound for online reads? In *Theory of Cryptography - 16th International Conference, TCC 2018, Panaji, India, November 11-14, 2018, Proceedings, Part II*, pages 603–635, 2018.
- [Yek07] Sergey Yekhanin. Towards 3-query locally decodable codes of subexponential length. In *Proceedings of the 39th Annual ACM Symposium on Theory of Computing, San Diego, California, USA, June 11-13, 2007*, pages 266–274, 2007.
- [YFR⁺13] Xiangyao Yu, Christopher W. Fletcher, Ling Ren, Marten van Dijk, and Srinivas Devadas. Generalized external interaction with tamper-resistant hardware with bounded information leakage. In *CCSW'13, Proceedings of the 2013 ACM Cloud Computing Security Workshop, Co-located with CCS 2013, Berlin, Germany, November 4, 2013*, pages 23–34, 2013.
- [ZMZQ16] Jinsheng Zhang, Qiumao Ma, Wensheng Zhang, and Daji Qiao. MSKT-ORAM: A constant bandwidth ORAM without homomorphic encryption. *IACR Cryptology ePrint Archive*, 2016:882, 2016.